

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 191 613 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**29.03.2006 Bulletin 2006/13**

(51) Int Cl.:  
**H01L 51/50<sup>(2006.01)</sup>** **H05B 33/14<sup>(2006.01)</sup>**  
**C09K 11/06<sup>(2006.01)</sup>**

(21) Application number: **01122938.2**

(22) Date of filing: **25.09.2001**

(54) **Luminescence device, display apparatus and metal coordination compound**

Lumineszente Vorrichtung, Bildanzeigevorrichtung und Metallkoordinationsverbindung

Dispositif luminescent, dispositif d'affichage et composé complexe d'un métal

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **26.09.2000 JP 2000292492**  
**26.09.2000 JP 2000292493**  
**27.11.2000 JP 2000358741**  
**27.11.2000 JP 2000358742**  
**27.08.2001 JP 2001255537**  
**19.09.2001 JP 2001284599**

(43) Date of publication of application:  
**27.03.2002 Bulletin 2002/13**

(60) Divisional application:  
**05018186.6 / 1 598 879**

(73) Proprietor: **CANON KABUSHIKI KAISHA**  
**Ohta-ku, Tokyo (JP)**

(72) Inventors:

- Takiguchi, Takao  
Tokyo (JP)
- Mizutani, Hidemasa  
Tokyo (JP)
- Okada, Shinjiro  
Tokyo (JP)
- Tsuboyama, Akira  
Tokyo (JP)
- Miura, Seishi  
Tokyo (JP)
- Moriyama, Takashi  
Tokyo (JP)
- Igawa, Satoshi  
Tokyo (JP)
- Kamatani, Jun  
Tokyo (JP)
- Furugori, Manabu  
Tokyo (JP)

(74) Representative: **TBK-Patent**  
**Bavariaring 4-6**  
**80336 München (DE)**

(56) References cited:  
**EP-A- 1 175 128** **WO-A-02/02714**  
**WO-A-02/15645**

- GRUSHIN V V ET AL: "New, efficient electroluminescent materials based on organometallic Ir complexes" **CHEMICAL COMMUNICATIONS, ROYAL SOCIETY OF CHEMISTRY, GB, 2001, pages 1494-1495, XP002196401 ISSN: 1359-7345**
- SERGEY LAMANSKY: "Molecularly doped polymer light emitting diodes utilizing phosphorescent Pt(II) and Ir(III) dopants" **ORGANIC ELECTRONICS, ELSEVIER, AMSTERDAM, NL, no. 2, 2001, pages 53-62, XP002196402 ISSN: 1566-1199**
- ADACHI C; BALDO M A; FORREST S R: "High-efficiency organic electrophosphorescent devices with tris(2-phenylpyridine)iridium doped into electron-transporting materials" **APPLIED PHYSICS LETTERS, vol. 77, no. 6, 7 August 2000 (2000-08-07), pages 904-906, XP002199389**
- BALDO M A; LAMANSKY S; BURROWS P E; THOMPSON M E; FORREST S R: "Very high-efficiency green organic light-emitting devices based on electrophosphorescence" **APPLIED PHYSICS LETTERS, vol. 75, no. 1, 5 July 1999 (1999-07-05), page 4-6 XP002199390**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 191 613 B1**

- FORD A; SINN E; WOODWARD S:  
"Regioselectivity in metallation reactions of  
2-(2'-naphthyl)pyridine: 1'- versus 3'-reactivity in  
mercuration and palladation reactions. Crystal  
structure of chloro(pyridine) [2-(2'-pyridinyl)  
naphthyl-C3,N]palladium" JOURNAL OF  
ORGANOMETALLIC CHEMISTRY, vol. 493, 1995,  
pages 215-220, XP002199391

## Description

## FIELD OF THE INVENTION AND RELATED ART

[0001] The present invention relates to a luminescence device, a metal coordination compound therefor and a display apparatus including the luminescence device. More specifically, the present invention relates to an organic (electro-) luminescence device employing a metal coordination compound having a formula (1) or (2) appearing hereinafter as a luminescence material, the metal coordination compound adapted for use in the luminescence device, and a display apparatus using the luminescence device.

[0002] An organic electroluminescence (EL) device has been extensively studied as a luminescence device with a high responsiveness and high efficiency.

[0003] The organic EL device generally has a sectional structure as shown in Figure 1A or 1B (e.g., as described in "Macromol. Symp.", 125, pp. 1 - 48 (1997)).

[0004] Referring to the figures, the EL device generally has a structure including a transparent substrate 15, a transparent electrode 14 disposed on the transparent substrate 15, a metal electrode 11 disposed opposite to the transparent electrode 14, and a plurality of organic (compound) layers disposed between the transparent electrode 14 and the metal electrode 11.

[0005] Referring to Figure 1, the EL device in this embodiment has two organic layers including a luminescence layer 12 and a hole transport layer 13.

[0006] The transparent electrode 14 may be formed of a film of ITO (indium tin oxide) having a larger work function to ensure a good hole injection performance into the hole transport layer. On the other hand, the metal electrode 11 may be formed of a layer of aluminum, magnesium, alloys thereof, etc., having a smaller work function to ensure a good electron injection performance into the organic layer(s).

[0007] These (transparent and metal) electrodes 14 and 11 may be formed in a thickness of 50 - 200 nm.

[0008] The luminescence layer 12 may be formed of, e.g., aluminum quinolinol complex (representative example thereof may include Alq3 described hereinafter) having an electron transporting characteristic and a luminescent characteristic. The hole transport layer 13 may be formed of, e.g., triphenyldiamine derivative (representative example thereof may include  $\alpha$ -NPD described hereinafter) having an electron donating characteristic.

[0009] The above-described EL device exhibits a rectification characteristic, so that when an electric field is applied between the metal electrode 11 as a cathode and the transparent electrode 14 as an anode, electrons are injected from the metal electrode 11 into the luminescence layer 12 and holes are injected from the transparent electrodes 14.

[0010] The thus-injected holes and electrons are recombined within the luminescence layer 12 to produce excitons, thus causing luminescence. At that time, the hole transport layer 13 functions as an electron-blocking layer to increase a recombination efficiency at the boundary between the luminescence layer 12 and the hole transport layer 13, thus enhancing a luminescence efficiency.

[0011] Referring to Figure 1B, in addition to the layers shown in Figure 1A, an electron transport layer 16 is disposed between the metal electrode 11 and the luminescence layer 12, whereby an effective carrier blocking performance can be ensured by separating functions of luminescence, electron transport and hole transport, thus allowing effective luminescence.

[0012] The electron transport layer 16 may be formed of, e.g., oxadiazole derivatives.


[0013] In ordinary organic EL devices, fluorescence caused during a transition of luminescent center molecule from a singlet excited state to a ground state is used as luminescence.

[0014] On the other hand, not the above fluorescence (luminescence) via singlet exciton, phosphorescence (luminescence) via triplet exciton has been studied for use in organic EL device as described in, e.g., "Improved energy transfer in electrophosphorescent device" (D.F. O'Brien et al., Applied Physics Letters, Vol. 74, No. 3, pp. 442 - 444 (1999)) and "Very high-efficiency green organic light-emitting devices based on electrophosphorescence" (M.A. Baldo et al., Applied Physics Letters, Vol. 75, No. 1, pp. 4 - 6 (1999)).



[0015] The EL devices shown in these documents may generally have a sectional structure shown in Figure 1C.

[0016] Referring to Figure 1C, four organic layers including a hole transfer layer 13, a luminescence layer 12, an exciton diffusion-prevention layer 17, and an electron transport layer 16 are successively formed in this order on the transparent electrode (anode) 14.


[0017] In the above documents, higher efficiencies have been achieved by using four organic layers including a hole transport layer 13 of  $\alpha$ -NPD (shown below), an electron transport layer 16 of Alq3 (shown below), an exciton diffusion-prevention layer 17 of BPC (shown below), and a luminescence layer 12 of a mixture of CPB (shown below) as a host material with Ir(ppy)<sub>3</sub> (shown below) or PtOEP (shown below) as a guest phosphorescence material doped into CBP at a concentration of ca. 6 wt. %.

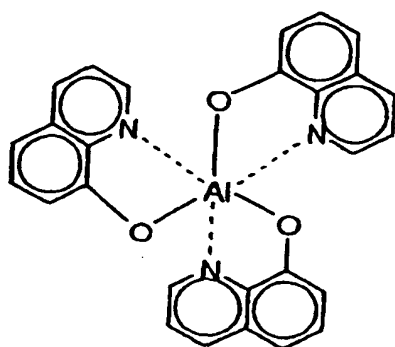



Alq3

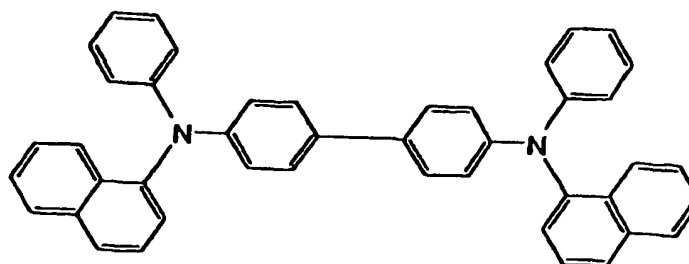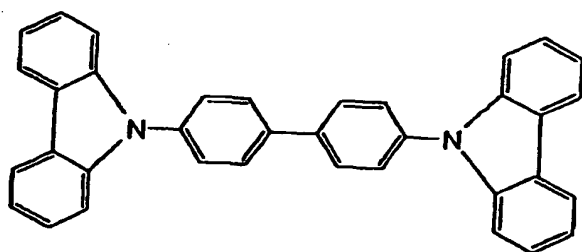 $\alpha$ -NPD

CBP

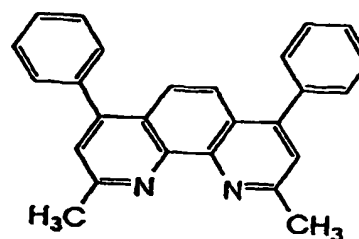

BCP

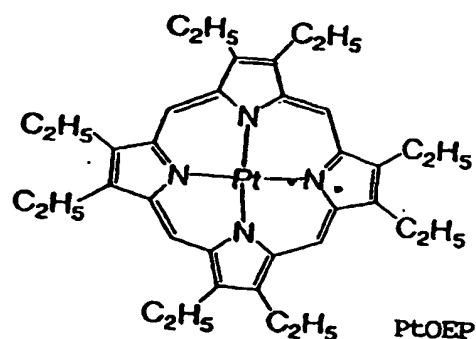Ir(ppy)<sub>3</sub>

PtOEP

Alq3: tris(8-hydroxyquinoline) aluminum (aluminum-quinolinol complex),  
 $\alpha$ -NPD: N4,N4'-di-naphthalene-1-yl-N4,N4'-diphenyl-biphenyl-4,4'-diamine (4,4'-bis[N-(1-naphthyl)-N-phenyl-amino]biphenyl),  
 CBP: 4,4'-N,N'-dicarbazole-biphenyl,  
 BCP: 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline,  
 Ir(ppy)<sub>3</sub>: fac tris(2-phenylpyridine)iridium (iridium-phenylpyridine complex), and  
 PtOEP: 2,3,7,8,12,13,17,18-octaethyl-21H,23H-porphine platinum (platinum-octaethyl porphine complex).

[0018] The phosphorescence (luminescence) material used in the luminescence layer 12 has attracted notice. This

is because the phosphorescence material is expected to provide a higher luminescence efficiency in principle.

[0019] More specifically, in the case of the phosphorescence material, excitons produced by recombination of carriers comprise singlet excitons and triplet excitons presented in a ratio of 1:3. For this reason, when fluorescence caused during the transition from the singlet excited state to the ground state is utilized, a resultant luminescence efficiency is 25 % (as upper limit) based on all the produced excitons in principle.

[0020] On the other hand, in the case of utilizing phosphorescence caused during transition from the triplet excited state, a resultant luminescence efficiency is expected to be at least three times that of the case of fluorescence in principle. In addition thereto, if intersystem crossing from the singlet excited state (higher energy level) to the triplet excited state is taken into consideration, the luminescence efficiency of phosphorescence can be expected to be 100 % (four times that of fluorescence) in principle.

[0021] The use of phosphorescence based on transition from the triplet excited state has also been proposed in, e.g., Japanese Laid-Open Patent Application (JP-A) 11-329739, JP-A 11-256148 and JP-A 8-319482.

[0022] An iridium-phenylpyrimidine complex having a methyl substituent has been described in "Preprint for the 61-th Academic Lecture of the Applied Physics Society of Japan", the third volume, P.1117, 6p-ZH-1 (2000) ("Document 1"). Further, an iridium-phenylpyrimidine complex having 4-, 5-fluorine substituents (herein, referred to as a "metal coordination compound A" has been described in "Polymer Preprints", 41(1), pp. 770 - 771 (2000) ("Document 2").

[0023] However, the above-mentioned organic EL devices utilizing phosphorescence have accompanied with a problem of luminescent deterioration particularly in an energized state.

[0024] EP-A-1 175 128, WO-A-02/02714, WO-A-02/15645, which are documents according to Art. 54(3),(4) EPC, describe several iridium compounds and their use in luminescence devices.

[0025] Grushin et al. (Chem. Commun., 2001, 1494-1495) describe OLED devices based on fluorinated organometallic iridium compounds.

[0026] Woodward et al. (Journal of Organometallic Chemistry 493 (1995) 215-220) describe palladium complexes with 2-(2'-naphthyl)pyridine.

[0027] The reason for luminescent deterioration has not been clarified as yet but may be attributable to such a phenomenon that the life of triplet exciton is generally longer than that of singlet exciton by at least three digits, so that molecule is placed in a higher-energy state for a long period to cause reaction with ambient substance, formation of exciplex or excimer, change in minute molecular structure, structural change of ambient substance, etc.

[0028] Accordingly, the (electro)phosphorescence EL device is expected to provide a higher luminescence efficiency as described above, while the EL device is required to suppress or minimize the luminescent deterioration in energized state.


## SUMMARY OF THE INVENTION

[0029] An object of the present invention is to provide a luminescence device capable of providing a high-efficiency luminescent state at a high brightness (or luminance) for a long period while minimizing the deterioration in luminescence in energized state.

[0030] Herein, although evaluation criteria for "high efficiency" and "high brightness (luminance) for a long period" may vary depending on luminescent performances required for an objective luminescence device (EL device), for example, a luminescence efficiency of at least 1 cd/W based on an inputted current value may be evaluated as "high efficiency". Further, a luminance half-life of, e.g., at least 500 hours at the time of luminescence at an initial luminance of 100 cd/m<sup>2</sup> may be evaluated as "high brightness (luminance) for a long period" or a smaller luminance deterioration in energized state.


[0031] Another object of the present invention is to provide a metal coordination compound as a material suitable for an organic layer for the luminescence device.

[0032] According to the present invention, there is provided a luminescence device, comprising: an organic compound layer comprising a metal coordination compound represented by the following formula (1):

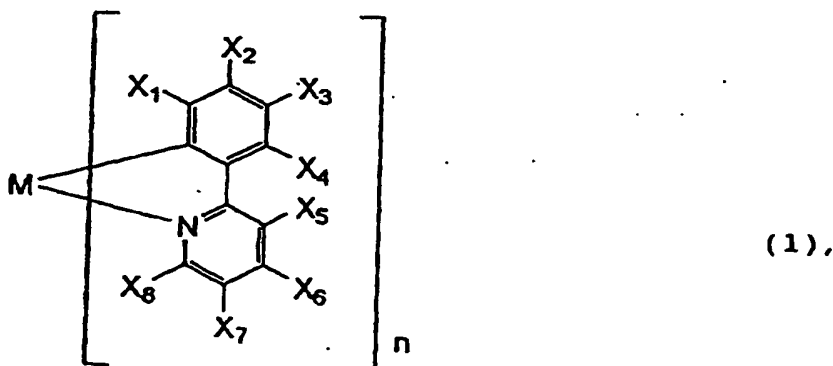


15 wherein M denotes Rh or Pd; n is 2 or 3; and X1 to X8 independently denote hydrogen atom or a substituent selected from the group consisting of halogen atom; nitro group; trifluoromethyl group; trialkylsilyl group having three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 2 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom; with the proviso that at least one of X1 to X8 is a substituent other than hydrogen atom, and X2 and X3 cannot be fluorine atom at the same time.

20 [0033] According to the present invention, there is also provided a metal coordination compound, adapted for use in a luminescence device, represented by the following formula (1):

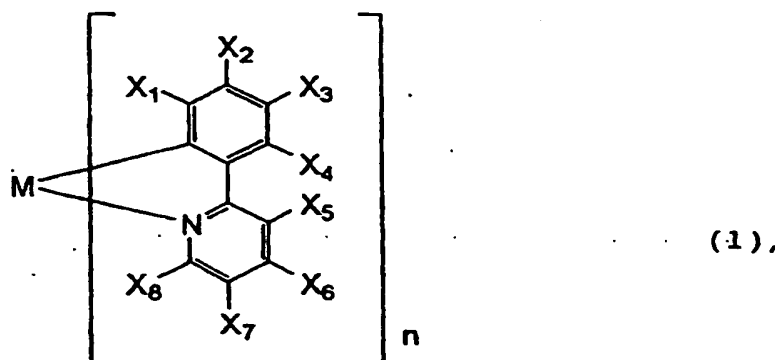


40 wherein M denotes Rh or Pd; n is 2 or 3; and X1 to X8 independently denote hydrogen atom or a substituent selected from the group consisting of halogen atom; nitro group; trifluoromethyl group; trialkylsilyl group having three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 2 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom; with the proviso that at least one of X1 to X8 is a substituent other than hydrogen atom, and X2 and X3 cannot be fluorine atom at the same time.

45 [0034] The present invention provides a luminescence device, comprising: an organic compound layer comprising a metal coordination compound represented by the following formula (2):

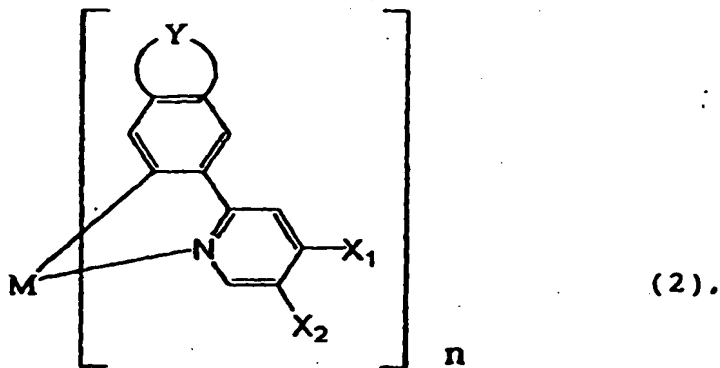

wherein M denotes Ir, Rh or Pd; n is 2 or 3; Y denotes an alkylene group having 2 - 4 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and capable of including hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote hydrogen atom; halogen atom; nitro group; trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom.

[0035] The present invention also provides a metal coordination compound, adapted for use in a luminescence device, represented by the following formula (2):

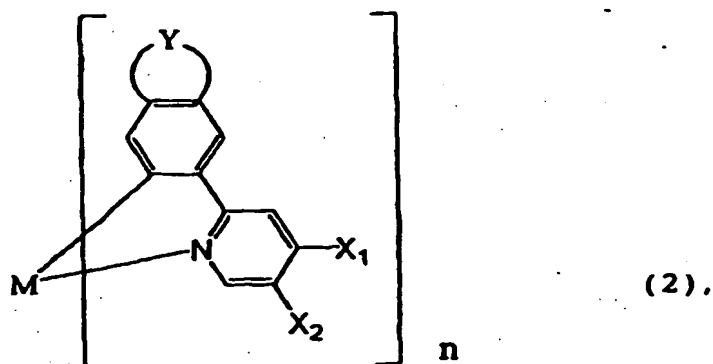

wherein M denotes Ir, Rh or Pd; n is 2 or 3; Y denotes an alkylene group having 2 - 4 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and capable of including hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote hydrogen atom; halogen atom; nitro group; trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms capable of including one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and capable of including hydrogen atom which can be replaced with fluorine atom.

[0036] The present invention further provides a luminescence device of formula (1) according to claim 26 and a metal coordination compound of formula (1) according to claim 27.

[0037] The present invention further provides a display apparatus including the above-mentioned luminescence device and drive means for driving the luminescence device.

[0038] These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0039]

Figures 1A, 1B and 1C are respectively a schematic sectional view of a layer structure of a luminescence device. Figure 2 is a graph showing a relationship between a Hammett's substitution constant  $\sigma$  and a peak (maximum) emission wavelength  $\lambda_{PE}$ .

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0040] In the case where a luminescence layer for an organic EL device is formed of a carrier transporting host material and a phosphorescent guest material, a process of emission of light (phosphorescence) may generally involve the following steps:

- (1) transport of electron and hole within a luminescence layer,
- (2) formation of exciton of the host material,
- (3) transmission of excited energy between host material molecules,
- (4) transmission of excited energy from the host material molecule to the guest material molecule,
- (5) formation of triplet exciton of the guest material, and
- (6) emission of light (phosphorescence) caused during transition from the triplet excited state to the ground state of the guest material.

[0041] In the above steps, desired energy transmission and luminescence may generally be caused based on various quenching and competition.

[0042] In order to improve a luminescence efficiency of the EL device, a luminescence center material per se is required to provide a higher yield of luminescence quantum. In addition thereto, an efficient energy transfer between host material molecules and/or between host material molecule and guest material molecule is also an important factor.

[0043] Further, the above-described luminescent deterioration in energized state may presumably relate to the luminescent center material per se or an environmental change thereof by its ambient molecular structure.

[0044] For this reason, our research group has extensively investigated an effect of use of various metal coordination compounds as the luminescent center material and as a result, has found that the metal coordination compound represented by the above-mentioned formula (1) or (2) allows a high-efficiency luminescence with a high brightness (luminance) for a long period (i.e., a decreased luminescent deterioration in energized state).

[0045] The metal coordination compound of formula (1) may preferably have substituents X1 to X8 in which at least two of X1 to X8 are substituents other than hydrogen atom. Further, in the formula (1), at least one of X5 to X8 may preferably be a substituent other than hydrogen atom and/or at least two of X1 to X4 may preferably be substituents other than hydrogen atom.

[0046] The metal coordination compound represented by the formulas (1) causes phosphorescence (luminescence) and is assumed to have a lowest excited state comprising a triplet excited state liable to cause metal-to-ligand charge transfer (MLCT\* state). The phosphorescent emission of light (phosphorescence) is produced during the transition from the MLCT\* state to the ground state.

[0047] The metal coordination compound of formula (1) according to the present invention has been found to provide a higher phosphorescence yield of 0.1 - 0.9 and a shorter phosphorescence life of 1 - 60  $\mu$ sec.

[0048] A phosphorescence yield (P(m)) is obtained based on the following equation:

$$P(m)/P(s) = (S(m)/S(s)) \times (A(s)/A(m)),$$

wherein P(m) represents a phosphorescence yield of an (unknown) objective luminescent material, P(s) represents a known (standard) phosphorescence yield of standard luminescent material (Ir(ppy)<sub>3</sub>), S(m) represents an integrated intensity of (photo-)excited emission spectrum of the objective material, S(s) represents a known integrated intensity of the standard material, A(m) represents an absorption spectrum of an excited light wavelength of the objective material, and A(s) represents a known absorption spectrum of the standard material.

[0049] The shorter phosphorescence life is necessary to provide a resultant EL device with a higher luminescence efficiency. This is because the longer phosphorescence life increases molecules placed in their triplet excited state which is a waiting state for phosphorescence, thus lowering the resultant luminescence efficiency particularly at a higher current density.


[0050] Accordingly, the metal coordination compound of formula (1) according to the present invention is a suitable luminescent material for an EL device with a higher phosphorescence yield and a shorter phosphorescence life.

[0051] Further, we have found that it is possible to control an emission wavelength of the metal coordination compound of formula (1) by appropriately modifying the substituents X1 to X8 thereof. In this regard, as a result of our investigation



on various phosphorescence metal coordination compounds for a blue luminescence material required to have a peak (maximum) emission wavelength of at most 490 nm, we have found that it is very effective to introduce at least one substituent having a Hammett's substituent constant of at least 0.2 into the metal coordination compound of formula (1) in order to provide a shorter peak emission wavelength.

[0052] More specifically we investigated a relationship between Hammett's substituent constants  $\sigma$  of substituents X2, X3 and X4 with respect to carbon atom connected to iridium of an iridium complex (metal coordination compound) shown below and peak emission wavelengths  $\lambda_{PE}$  in toluene at 25 °C.

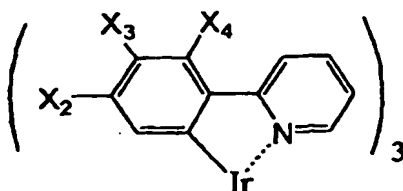

[0053] With respect to the Hammett's substituent constant  $\sigma$ , a Hammett's substituent constant  $\sigma_m$  for meta-position was used for the substituents X2 and X4 and a Hammett's substituent constant  $\sigma_p$  for para-position was used for the substituent X3. When two or more substituents other than hydrogen atom were present at X2 to X4, a sum of  $\sigma_m$  and  $\sigma_p$  was used as a Hammett's substituent constant  $\sigma$ .

[0054] In the present invention, specific values of  $\sigma_m$  and  $\sigma_p$  described on pages 96 - 103 (Table 1) of "Correlation between Structure and Activation of Drugs", Chemical Region Extra Edition 122, issued by Nanko-do (Japan) were used as those for X2 to X4. A part of  $\sigma_m$  and  $\sigma_p$  described therein is shown in Table 1 below.

Table 1

Substituent	$\sigma_p$	$\sigma_m$
F	0.06	0.34
Cl	0.23	0.37
CF <sub>3</sub>	0.54	0.43

[0055] For example, a metal coordination compound (Example Compound No. (121) appearing hereinafter, X2 = F, X3 = CF<sub>3</sub>, X4 = H) has a Hammett's substituent constant  $\sigma = 0.34 + 0.54 = 0.88$ . In a similar manner, Hammett's substituent constants  $\sigma$  of several metal coordination compounds (Ex. Comp. Nos. (1), (32), (122) and (111) described later and the metal coordination compound A described in the above-mentioned Document 2) are calculated and shown in Table 2 below together with corresponding peak emission wavelength  $\lambda_{PE}$  in toluene at 25 °C. The results of Table 2 are also shown in Figure 2.

Table 2

Compound	$\sigma$	$\lambda_{PE}$ (nm)
Ex. Comp. No. (1)	0.06	522
Metal coordination compound A	0.40	505
Ex. Comp. No. (32)	0.54	487
Ex. Comp. No. (122)	0.68	471
Ex. Comp. No. (121)	0.88	466
Ex. Comp. No. (111)	0.91	479

[0056] As apparent from Table 2 and Figure 2, introduction of substituent(s) having a larger Hammett's substituent constant is very effective to shorten the peak emission wavelength. Specifically, the metal coordination compound having the sum of peak emission wavelengths of at least 0.41, particularly at least 0.50 is suitable as the blue luminescent material. A similar effect can be expected also for metal coordination compounds other than the metal coordination compound of formula (1) of the present invention.

[0057] As described above, the metal coordination compound of formula (1) is a suitable luminescent material for the EL device.

[0058] Further, as shown in Examples appearing hereinafter, it has been substantiated that the metal coordination compound of formula (1) of the present invention has an excellent stability in a continuous energization test.

[0059] This may be attributable to introduction of particular substituents (X1 to X8) allowing control of intermolecular interaction with a host luminescent material (e.g., CBP described above) and suppression of formation of associated exciton leading to thermal quenching, thus minimizing quenching to improve device characteristics.

[0060] In this regard, the methyl group of methyl-substituted iridium-phenylpyrimidine complex described in the above-mentioned Document 1 has a smaller bulkiness than ethyl group and methoxy group and a smaller electronic effect than halogen atom, trifluoromethyl group and methoxy group. As a result, the effect of controlling intermolecular interaction in the present invention cannot be expected.

[0061] Further, compared with 4-, 5-fluorine (substituted) iridium-phenylpyrimidine complex (metal coordination compound A) described in the above-mentioned Document 2, it has been substantiated that a luminescence device using the metal coordination compound of formula (1) according to the present invention has a higher durability, i.e., a higher luminance stability for a long period, shown in Examples described later.

[0062] Further, in the case of phosphorescent (luminescent) material, luminescent characteristics are largely affected by its molecular environment. On the other hand, principal characteristics of the fluorescent material are studied based on photoluminescence.

[0063] For this reason, results of photoluminescence of the phosphorescent material do not reflect luminescent characteristics of the resultant EL device in many cases since the luminescent characteristics in the case of the phosphorescent material depend on a magnitude of polarity of ambient host material molecules, ambient temperature, presence state of the material (e.g., solid state or liquid state, etc. Accordingly, different from the fluorescent material, it is generally difficult to expect the resultant EL characteristics for the phosphorescent material by simply removing a part of characteristics from photoluminescence results.

[0064] Next, the metal coordination compound of formula (2) according to the present invention will be described.

[0065] The metal coordination compound of formula (2) may preferably have hydrogen atom(s) as at least one of X1 and X2 in the formula (2).

[0066] Similarly as the metal coordination compound of formula (1), the metal coordination compound of formula (2) also causes phosphorescence (luminescence) and is assumed to have a lowest excited state comprising a triplet excited state liable to cause metal-to-ligand charge transfer (MLCT\* state). The phosphorescent emission of light (phosphorescence) is produced during the transition from the MLCT\* state to the ground state.

[0067] The metal coordination compound according to the present invention has been found to provide a higher phosphorescence yield of 0.15 - 0.9 and a shorter phosphorescence life of 1 - 40 psec, as a result of a luminescence test based on photoluminescence by photo-excitation.

[0068] The shorter phosphorescence life is necessary to provide a resultant EL device with a higher luminescence efficiency. This is because the longer phosphorescence life increases molecules placed in their triplet excited state which is a waiting state for phosphorescence, thus lowering the resultant luminescence efficiency particularly at a higher current density.

[0069] Accordingly, the metal coordination compound of formula (2) according to the present invention is a suitable luminescent material for an EL device with a higher phosphorescence yield and a shorter phosphorescence life.

[0070] Further, by appropriately modifying the alkylene group Y and/or the substituents X1 and X2, emission wavelength control can be expected for the resultant metal coordination compound of formula (2).

[0071] As described above, the metal coordination compound of formula (2) is a suitable luminescent material for the EL device.

[0072] Further, as shown in Examples appearing hereinafter, it has been substantiated that the metal coordination compound of formula (2) of the present invention has an excellent stability in a continuous energization test.

[0073] This may be attributable to introduction of particular alkylene group and/or substituents (Y, X1, X2) allowing control of intermolecular interaction with a host luminescent material (e.g., CBP described above) and suppression of formation of associated exciton leading to thermal quenching, thus minimizing quenching to improve device characteristics.

[0074] The luminescence device (EL) device according to the present invention employs the above-mentioned metal coordination compound in an organic layer, particularly a luminescence layer.

[0075] Specifically, the luminescence device may preferably include the organic layer comprising the metal coordination compound of formula (1) or formula (2) between a pair of oppositely disposed electrodes comprising a transparent electrode (anode) and a metal electrode (cathode) which are supplied with a voltage to cause luminescence, thus constituting an electric-field luminescence device.

[0076] The liquid crystal of the present invention has a layer structure shown in Figures 1A to 1C as specifically described above.



[0077] By the use of the metal coordination compound of formula (1) or formula (2) of the present invention, the resultant luminescence device has a high luminescence efficiency as described above.

[0078] The luminescence device according to the present invention may be applicable to devices required to allow energy saving and high luminance, such as those for display apparatus and illumination apparatus, a light source for printers, and backlight (unit) for a liquid crystal display apparatus. Specifically, in the case of using the luminescence device of the present invention in the display apparatus, it is possible to provide a flat panel display apparatus capable of exhibiting an excellent energy saving performance, a high visibility and a good lightweight property. With respect to the light source, it becomes possible to replace a laser light source of laser beam printer currently used widely with the luminescence device according to the present invention. Further, when the luminescence device of the present invention is arranged in independently addressable arrays as an exposure means for effecting desired exposure of light to a photosensitive drum for forming an image, it becomes possible to considerably reducing the volume (size) of image forming apparatus. With respect to the illumination apparatus and backlight (unit), the resultant apparatus (unit) using the luminescence device of the present invention is expected to have an energy saving effect.


[0079] The metal coordination compound of formula (1) may generally be synthesized through the following reaction scheme.

(Iridium complex)

[0080]

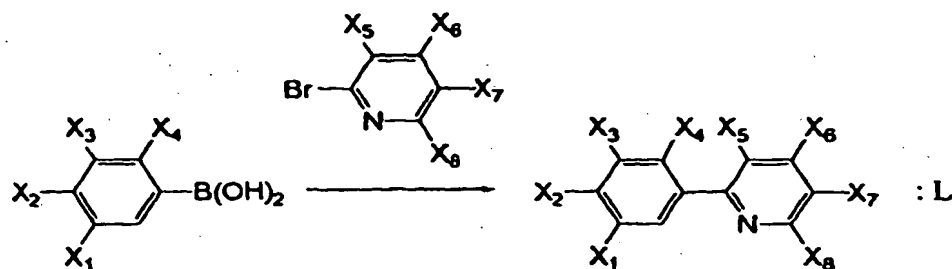

or




(Rhodium complex)

[0081] Rh complex may be synthesized in the same manner as in Ir complex shown above.

(Palladium complex)

[0082]

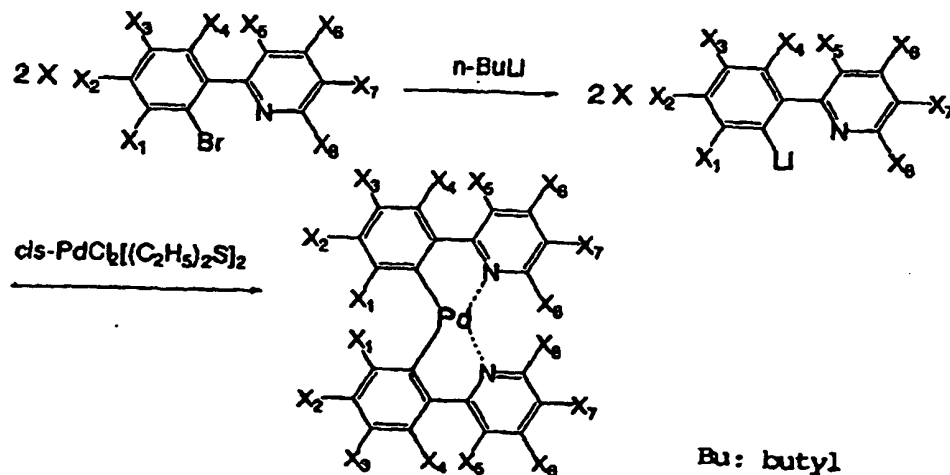

[0083] Specific and non-exhaustive examples of the metal coordination compound of formula (1) may include those (Example Compound Nos. (1-1) to (1-180)) shown in Tables 3 - 8 wherein Ex. Comp. Nos. (1-1) to (1-180) are simply indicated as (1) to (180), respectively.

Table 3

$N_{\text{H}}$	M	E	$X_1$	$X_2$	$X_3$	$X_4$	$X_5$	$X_6$	$X_7$	$X_8$
(1)*	Br	3	H	H	F	H	H	H	H	H
(2)*	Br	3	H	F	H	H	H	H	H	H
(3)*	Br	3	H	H	Cl	H	H	H	H	H
(4)*	Br	3	H	H	F	H	H	OCH <sub>3</sub>	H	H
(5)*	Br	3	H	H	F	H	H	H	Br	H
(6)*	Br	3	H	C <sub>2</sub> H <sub>5</sub>	H	H	H	H	H	H
(7)*	Br	3	H	H	NO <sub>2</sub>	H	H	H	H	H
(8)*	Br	3	H	H	NO <sub>2</sub>	H	H	H	CF <sub>3</sub>	H
(9)*	Br	3	H	H	NO <sub>2</sub>	H	H	NO <sub>2</sub>	H	H
(10)*	Br	3	H	H	NO <sub>2</sub>	H	H	OC <sub>11</sub> H <sub>23</sub>	H	H
(11)*	Br	3	H	H	C <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(12)*	Br	3	H	C <sub>2</sub> H <sub>5</sub>	OCH <sub>3</sub>	H	H	H	H	H
(13)*	Br	3	H	H	C <sub>2</sub> H <sub>5</sub>	H	H	OCH <sub>3</sub>	H	H
(14)*	Br	3	H	C <sub>2</sub> H <sub>4</sub>	H	H	H	H	H	H
(15)*	Br	3	H	H	OCH <sub>3</sub>	H	H	H	H	H
(16)*	Br	3	H	OCH <sub>3</sub>	OCH <sub>3</sub>	H	H	H	H	H
(17)*	Br	3	H	H	OCH(OH) <sub>2</sub>	H	H	H	H	H
(18)*	Br	3	H	H	OC <sub>11</sub> H <sub>21</sub>	H	H	H	H	H
(19)*	Br	3	H	H	OC <sub>10</sub> H <sub>20</sub>	H	H	H	H	H
(20)*	Br	3	H	H	OCH <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H
(21)*	Br	3	H	H	OCH(OH) <sub>2</sub>	H	H	OCH <sub>3</sub>	H	H
(22)*	Br	3	H	H	OC <sub>10</sub> H <sub>20</sub>	H	H	NO <sub>2</sub>	H	H
(23)*	Br	3	H	H	OCH(OH) <sub>2</sub>	H	H	H	CF <sub>3</sub>	H
(24)*	Br	3	H	H	SC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(25)*	Br	3	H	OCH <sub>2</sub> CH=CH <sub>2</sub>	H	H	H	H	H	H
(26)*	Br	3	H	H	OCH <sub>2</sub> CH=CC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(27)*	Br	3	H	H	COCH <sub>3</sub>	H	H	H	H	H
(28)*	Br	3	H	H	COCH <sub>3</sub>	H	H	NO <sub>2</sub>	H	H
(29)*	Br	3	H	H	COCH <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(30)*	Br	3	H	H	COCH <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H

\* Reference Compound

Table 4

No.	M	n	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>
(31)	Ir	3	H	H	COC <sub>6</sub> H <sub>10</sub>	H	H	H	H	H
(32)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(33)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(34)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(35)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(36)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(37)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(38)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(39)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(40)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(41)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(42)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(43)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(44)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(45)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(46)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(47)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(48)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(49)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(50)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(51)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(52)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(53)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(54)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(55)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(56)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(57)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(58)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(59)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H
(60)	Ir	3	H	H	CF <sub>3</sub>	H	H	H	H	H

\* Reference Compound

Table 5

No.	M	n	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>
(61)	R <sup>6</sup>	3	H	F	F	H	H	H	H	H
(62)	R <sup>6</sup>	3	F	H	H	H	H	H	H	H
(63)	R <sup>6</sup>	3	H	F	F	H	H	OCH <sub>3</sub>	H	H
(64)	R <sup>6</sup>	3	H	NO <sub>2</sub>	NO <sub>2</sub>	H	H	H	H	H
(65)	R <sup>6</sup>	3	H	NO <sub>2</sub>	NO <sub>2</sub>	H	H	OC <sub>2</sub> H <sub>5</sub>	H	H
(66)	R <sup>6</sup>	3	H	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(67)	R <sup>6</sup>	3	H	OCH <sub>3</sub>	OCH <sub>3</sub>	H	H	H	H	H
(68)	R <sup>6</sup>	3	H	H	H	H	H	H	H	H
(69)	R <sup>6</sup>	3	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H	OCH <sub>3</sub>	H	H
(70)	R <sup>6</sup>	3	H	OC <sub>2</sub> H <sub>5</sub>	OC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(71)	R <sup>6</sup>	3	H	OC <sub>2</sub> H <sub>5</sub>	OC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(72)	R <sup>6</sup>	3	H	OC <sub>2</sub> H <sub>5</sub>	OC <sub>2</sub> H <sub>5</sub>	H	H	NO <sub>2</sub>	H	H
(73)	R <sup>6</sup>	3	H	OCH <sub>3</sub>	OCH <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H
(74)	R <sup>6</sup>	3	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H	H	CF <sub>3</sub>	H
(75)	R <sup>6</sup>	3	H	OCH <sub>2</sub> CH=CH <sub>2</sub>	OCH <sub>2</sub> CH=CH <sub>2</sub>	H	H	H	H	H
(76)	R <sup>6</sup>	3	H	OC≡CC <sub>2</sub> H <sub>5</sub>	OC≡CC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(77)	R <sup>6</sup>	3	H	SC <sub>2</sub> H <sub>5</sub>	SC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(78)	R <sup>6</sup>	3	H	SC <sub>2</sub> H <sub>5</sub>	SC <sub>2</sub> H <sub>5</sub>	H	H	OCH <sub>3</sub>	H	H
(79)	R <sup>6</sup>	3	H	SC <sub>2</sub> H <sub>5</sub>	SC <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(80)	R <sup>6</sup>	3	H	COCH <sub>3</sub>	COCH <sub>3</sub>	H	H	H	H	H
(81)	R <sup>6</sup>	3	H	COCH <sub>3</sub>	COCH <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H
(82)	R <sup>6</sup>	3	H	CF <sub>3</sub>	CF <sub>3</sub>	H	H	H	H	H
(83)	R <sup>6</sup>	3	H	CF <sub>3</sub>	CF <sub>3</sub>	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H
(84)	R <sup>6</sup>	3	H	OCF <sub>3</sub>	OCF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(85)	R <sup>6</sup>	3	H	OCH <sub>2</sub> CF <sub>3</sub>	OCH <sub>2</sub> CF <sub>3</sub>	H	H	H	H	H
(86)	R <sup>6</sup>	3	H	O(CH <sub>2</sub> ) <sub>2</sub> CF <sub>3</sub>	O(CH <sub>2</sub> ) <sub>2</sub> CF <sub>3</sub>	H	H	H	H	H
(87)	R <sup>6</sup>	3	H	H	H	H	H	OCH <sub>3</sub>	H	H
(88)	R <sup>6</sup>	3	H	Si(CH <sub>3</sub> ) <sub>2</sub> C <sub>2</sub> H <sub>5</sub>	Si(CH <sub>3</sub> ) <sub>2</sub> C <sub>2</sub> H <sub>5</sub>	H	H	H	H	H
(89)	R <sup>6</sup>	3	H	Si(CH <sub>3</sub> ) <sub>2</sub> C <sub>2</sub> H <sub>5</sub>	Si(CH <sub>3</sub> ) <sub>2</sub> C <sub>2</sub> H <sub>5</sub>	H	H	H	H	H

Table 6

Ref.	M	n	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>
(91)	Pd	2	H	H	F	H	H	H	H	H
(92)	Pd	2	H	F	H	F	H	H	H	H
(93)	Pd	2	H	H	F	H	H	OC <sub>2</sub> H <sub>13</sub>	H	H
(94)	Pd	2	H	H	NO <sub>2</sub>	H	H	H	H	H
(95)	Pd	2	H	H	NO <sub>2</sub>	H	H	OC <sub>2</sub> H <sub>11</sub>	H	H
(96)	Pd	2	H	C <sub>2</sub> H <sub>5</sub>	OCH <sub>3</sub>	H	H	H	H	H
(97)	Pd	2	H	H	C <sub>2</sub> H <sub>11</sub>	H	H	OCH <sub>3</sub>	H	H
(98)	Pd	2	H	C <sub>12</sub> H <sub>25</sub>	H	H	H	H	H	H
(99)	Pd	2	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H	H	H	H
(100)	Pd	2	H	H	OC <sub>2</sub> H <sub>7</sub>	H	H	H	H	H
(101)	Pd	2	H	H	COC <sub>2</sub> H <sub>13</sub>	H	H	H	H	H
(102)	Pd	2	H	H	CF <sub>3</sub>	H	H	H	H	H
(103)	Pd	2	H	H	CF <sub>3</sub>	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H
(104)	Pd	2	H	H	OCF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(105)	Pd	2	H	H	Si(CH <sub>3</sub> ) <sub>3</sub>	H	H	H	H	H
(106)	Pd	2	H	H	F	H	H	OC <sub>2</sub> H <sub>11</sub>	H	H
(107)	Pd	2	H	H	NO <sub>2</sub>	H	H	OC <sub>2</sub> H <sub>7</sub>	H	H
(108)	Pd	2	H	H	C <sub>2</sub> H <sub>5</sub>	H	H	OCH <sub>3</sub>	H	H
(109)	Pd	2	H	C <sub>10</sub> H <sub>21</sub>	H	H	H	H	H	H
(110)	Pd	2	H	H	COCH <sub>3</sub>	H	H	H	H	H
(111)	Ir	3	H	Cl	CF <sub>3</sub>	H	H	H	H	H
(112)	Ir	3	H	Cl	CF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(113)	Ir	3	H	Cl	CF <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H
(114)	Rh	3	H	Cl	CF <sub>3</sub>	H	H	H	H	H
(115)	Rh	3	H	Cl	CF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(116)	Rh	3	H	Cl	CF <sub>3</sub>	H	H	CF <sub>3</sub>	H	H
(117)	Rh	3	H	Cl	CF <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H
(118)	Rh	3	H	Cl	CF <sub>3</sub>	H	H	C <sub>2</sub> H <sub>5</sub>	H	H
(119)	Pd	2	H	Cl	CF <sub>3</sub>	H	H	H	H	H
(120)	Pd	2	H	Cl	CF <sub>3</sub>	H	H	H	CF <sub>3</sub>	CF <sub>3</sub>



Table 7

No.	M	n	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>
(111)	Ir	3	H	F	CF <sub>3</sub>	H	H	H	H	H
(112)	Ir	3	H	F	H	F	H	H	H	H
(113)	Ir	3	H	CF <sub>3</sub>	H	CF <sub>3</sub>	H	H	H	H
(114)	Ir	3	H	CF <sub>3</sub>	H	F	H	H	H	H
(115)	Ir	3	H	CF <sub>3</sub>	CF <sub>3</sub>	H	H	H	Br	H
(116)	Ir	3	F	C <sub>6</sub> H <sub>5</sub>	H	H	H	H	H	H
(117)	Ir	3	F	H	NO <sub>2</sub>	H	H	H	H	H
(118)	Ir	3	F	H	NO <sub>2</sub>	F	H	H	CF <sub>3</sub>	H
(119)	Ir	3	F	H	NO <sub>2</sub>	H	H	NO <sub>2</sub>	H	H
(120)	Ir	3	F	H	NO <sub>2</sub>	H	H	OO <sub>11</sub> H <sub>23</sub>	H	H
(121)	Ir	3	F	H	C <sub>6</sub> H <sub>5</sub>	H	H	H	H	H
(122)	Ir	3	F	C <sub>6</sub> H <sub>5</sub>	OCH <sub>3</sub>	H	H	H	H	H
(123)	Ir	4	F	H	C <sub>6</sub> H <sub>5</sub>	H	H	OO <sub>11</sub> H <sub>23</sub>	H	H
(124)	Ir	3	H	C <sub>6</sub> H <sub>5</sub>	H	F	H	H	H	H
(125)	Ir	3	H	H	OCH <sub>3</sub>	F	H	H	H	H
(126)	Ir	3	H	OCH <sub>3</sub>	OCH <sub>3</sub>	F	H	H	H	H
(127)	Ir	3	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	F	H	H	H	H
(128)	Ir	3	H	H	OO <sub>11</sub> H <sub>11</sub>	F	H	H	H	H
(129)	Ir	3	H	H	OO <sub>11</sub> H <sub>23</sub>	F	H	H	H	H
(130)	Ir	3	H	H	OCH <sub>3</sub>	F	H	OCH <sub>3</sub>	H	H
(131)	Ir	3	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	F	OCH <sub>3</sub>	H	H
(132)	Ir	3	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	F	NO <sub>2</sub>	H	H
(133)	Ir	3	H	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	F	H	CF <sub>3</sub>	H
(134)	Ir	3	H	H	SC <sub>6</sub> H <sub>5</sub>	H	C <sub>6</sub> H <sub>5</sub>	H	H	H
(135)	Ir	3	H	OCH <sub>2</sub> CH=CH <sub>2</sub>	H	H	C <sub>6</sub> H <sub>5</sub>	H	H	H
(136)	Ir	3	H	H	OCH <sub>2</sub> CH=CH <sub>2</sub>	H	H	H	H	F
(137)	Ir	3	H	H	OCH <sub>3</sub>	H	H	H	H	F
(138)	Ir	3	H	H	OCH <sub>3</sub>	H	H	NO <sub>2</sub>	H	F
(139)	Ir	3	CF <sub>3</sub>	H	OCH <sub>3</sub>	H	H	OCH <sub>3</sub>	H	H

\* Reference Compound

Table 8



No.	M	n	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X <sub>5</sub>	X <sub>6</sub>	X <sub>7</sub>	X <sub>8</sub>
(181)	Ir	3	F	H	COCl <sub>2</sub> H <sub>9</sub>	H	H	H	H	H
(182)	Ir	3	H	CF <sub>3</sub>	H	F	H	H	H	H
(183)	Ir	3	F	H	CF <sub>3</sub>	H	H	H	CF <sub>3</sub>	H
(184)	Ir	3	H	H	CF <sub>3</sub>	F	H	NO <sub>2</sub>	H	H
(185)	Ir	3	H	H	CF <sub>3</sub>	F	H	OCH(CH <sub>3</sub> ) <sub>2</sub>	H	H
(186)	Ir	3	H	C <sub>2</sub> F <sub>7</sub>	H	CF <sub>3</sub>	H	H	H	H
(187)	Ir	3	H	H	OCF <sub>3</sub>	H	CF <sub>3</sub>	H	H	H
(188)	Ir	3	H	OCF <sub>3</sub>	H	H	C <sub>2</sub> H <sub>5</sub>	H	H	H
(189)	Ir	3	H	CF <sub>3</sub>	H	CF <sub>3</sub>	H	H	H	H
(190)	Ir	3	H	H	OCF <sub>3</sub>	H	F	H	CF <sub>3</sub>	H
(191)	Ir	3	H	H	OCF <sub>3</sub>	H	H	OCH <sub>3</sub>	H	F
(192)	Ir	3	H	H	OCH <sub>2</sub> CF <sub>2</sub>	H	H	H	H	F
(193)	Ir	3	H	O(CH <sub>2</sub> ) <sub>2</sub> CF <sub>3</sub>	H	H	H	H	H	F
(194)	Ir	3	H	H	O(CH <sub>2</sub> ) <sub>2</sub> OOCH <sub>2</sub> CF <sub>3</sub>	Cl	H	H	H	F
(195)	Ir	3	H	H	COOC <sub>2</sub> H <sub>5</sub>	F	H	H	H	H
(196)	Rh	3	H	COOCH <sub>3</sub>	H	H	F	H	H	H
(197)	Rh	3	H	H	O(CH <sub>2</sub> ) <sub>2</sub> CF <sub>2</sub>	H	C <sub>2</sub> H <sub>5</sub>	H	C <sub>2</sub> F <sub>11</sub>	H
(198)	Rh	3	H	H	H	H	H	OCH <sub>3</sub>	H	F
(199)	Rh	3	H	H	H	H	H	H	CF <sub>3</sub>	F
(200)	Rh	3	H	H	H	H	H	H	NO <sub>2</sub>	F
(201)	Rh	3	H	H	Si(CH <sub>3</sub> ) <sub>3</sub>	H	H	H	H	F
(202)	Rh	3	H	H	Si(CH <sub>3</sub> ) <sub>2</sub> CF <sub>3</sub>	H	H	H	H	F
(203)	Rh	3	H	H	Si(CH <sub>3</sub> ) <sub>2</sub> CF <sub>2</sub> H <sub>5</sub>	H	H	H	H	F
(204)	Rh	3	H	H	Si(CH <sub>3</sub> ) <sub>2</sub> CF <sub>2</sub> H <sub>5</sub>	F	H	H	H	H
(205)	Rh	3	H	H	Si(CH <sub>3</sub> ) <sub>2</sub>	F	H	H	H	H
(206)	Rh	3	H	H	H	F	H	H	H	H
(207)	Pd	2	H	C <sub>2</sub> H <sub>5</sub>	OCH <sub>3</sub>	F	H	Si(CH <sub>3</sub> ) <sub>2</sub> CF <sub>2</sub> H <sub>5</sub>	H	H
(208)	Pd	2	F	H	F	F	H	OCH <sub>3</sub>	H	H
(209)	Pd	2	F	H	F	F	H	OCH <sub>3</sub>	CF <sub>3</sub>	H
(210)	Pd	2	F	H	Si(CH <sub>3</sub> ) <sub>2</sub>	H	H	H	Br	H
(211)	Pd	2	F	Si(CH <sub>3</sub> ) <sub>2</sub> CF <sub>2</sub> H <sub>5</sub>	OCH <sub>3</sub>	H	H	H	H	H

\* Reference Compound.


**[0084]** The metal coordination compound of formula (2) may generally be synthesized through the following reaction scheme.

(Iridium complex)

**[0085]**

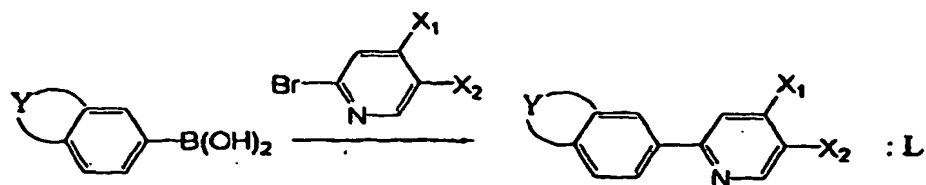

or




(Rhodium complex)

[0086] Rh complex may be synthesized in the same manner as in Ir complex shown above.


(Palladium complex)

[0087]

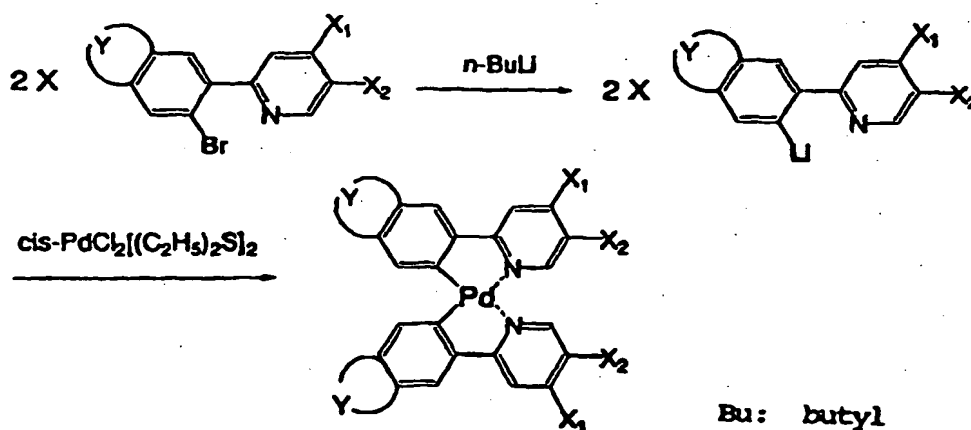

[0088] Specific and non-exhaustive examples of the metal coordination compound of formula (2) may include those (Example Compound Nos. (2-1) to (2-200) shown in Tables 9 - 15 wherein Ex. Comp. Nos. (2-1) to (2-200) are simply indicated as (1) to (200), respectively.

[0089] In Tables 9 - 15, symbols A to C' for alkylene group Y represents alkylene groups shown below.




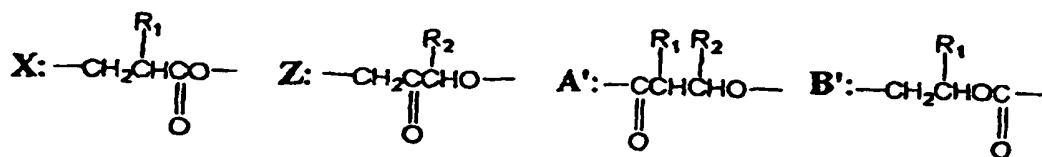






Table 9

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(1)	Ir	3	A	-	-	H	H
(2)	Ir	3	A	-	-	OCH <sub>3</sub>	H
(3)	Ir	3	B	H	-	H	H
(4)	Ir	3	B	H	-	OCH <sub>3</sub>	H
(5)	Ir	3	B	H	-	H	CF <sub>3</sub>
(6)	It	3	B	H	-	H	Cl

Table continued

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(7)	Ir	3	B	CH <sub>3</sub>	-	H	H
(8)	Ir	3	B	CH <sub>3</sub>	-	F	H
(9)	Ir	3	B	CH <sub>3</sub>	-	NO <sub>2</sub>	H
(10)	Ir	3	B	C <sub>2</sub> H <sub>5</sub>	-	H	H
(11)	Ir	3	B	C <sub>3</sub> H <sub>7</sub>	-	H	CF <sub>3</sub>
(12)	Ir	3	B	C <sub>2</sub> H <sub>5</sub> (CH <sub>3</sub> )CHCH <sub>2</sub>	-	H	H
(13)	Ir	4	B	C <sub>6</sub> H <sub>13</sub>	-	OCH(CH <sub>3</sub> ) <sub>2</sub>	H
(14)	Ir	3	B	C <sub>10</sub> H <sub>21</sub>	-	Si(CH <sub>3</sub> ) <sub>3</sub>	H
(15)	Ir	3	C	H	H	H	H
(16)	Ir	3	C	H	H	OCH <sub>3</sub>	H
(17)	Ir	3	C	H	H	H	CF <sub>3</sub>
(18)	Ir	3	C	H	H	F	H
(19)	Ir	3	C	H	H	NO <sub>2</sub>	H
(20)	Ir	3	C	H	H	OC <sub>5</sub> H <sub>11</sub>	H
(21)	Ir	3	C	H	H	O(CH <sub>2</sub> ) <sub>2</sub> C <sub>3</sub> F <sub>7</sub>	H
(22)	Ir	3	C	H	H	H	Si(C <sub>2</sub> H <sub>3</sub> ) <sub>3</sub>
(23)	Ir	3	C	H	H	H	Br
(24)	Ir	3	C	H	H	CH <sub>3</sub>	H
(25)	Ir	3	C	CH <sub>3</sub>	H	CH <sub>3</sub>	H
(26)	Ir	3	C	H	CH <sub>3</sub>	H	H
(27)	Ir	3	C	CH <sub>3</sub>	CH <sub>3</sub>	H	H
(28)	Ir	3	C	C <sub>3</sub> H <sub>7</sub>	H	Si(CH <sub>3</sub> ) <sub>3</sub>	H
(29)	Ir	3	C	H	C <sub>5</sub> H <sub>11</sub>	H	H
(30)	Ir	3	C	C <sub>8</sub> H <sub>17</sub>	H	Cl	H

Table 10

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(31)	Ir	3	C	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	H	C <sub>7</sub> F <sub>15</sub>
(32)	Ir	3	C	H	C <sub>6</sub> H <sub>13</sub>	NO <sub>2</sub>	H
(33)	Ir	3	C	C <sub>10</sub> H <sub>21</sub>	H	CF <sub>3</sub>	H
(34)	Ir	3	C	H	C <sub>9</sub> H <sub>19</sub>	H	OC <sub>4</sub> H <sub>9</sub>
(35)	Ir	3	D	-	-	H	H
(36)	Ir	3	D	-	-	OCH <sub>3</sub>	H
(37)	Ir	3	E	H	-	H	H
(38)	Ir	3	E	H	-	H	NO <sub>2</sub>
(39)	Ir	3	E	CH <sub>3</sub>	-	H	H
(40)	Ir	3	E	CH <sub>3</sub>	-	OCH <sub>3</sub>	H
(41)	Ir	3	E	CH <sub>3</sub>	-	H	CF <sub>3</sub>

Table continued

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(42)	Ir	3	E	CH <sub>3</sub>	-	NO <sub>2</sub>	H
(43)	Ir	3	E	CH <sub>3</sub>	-	OC <sub>3</sub> H <sub>7</sub>	H
(44)	Ir	3	E	C <sub>2</sub> H <sub>5</sub>	-	H	H
(45)	Ir	3	E	C <sub>2</sub> H <sub>5</sub>	-	H	CF <sub>3</sub>
(46)	Ir	3	E	C <sub>3</sub> H <sub>7</sub>	-	H	H
(47)	Ir	3	E	C <sub>3</sub> H <sub>7</sub>	-	OC <sub>5</sub> H <sub>11</sub>	H
(48)	Ir	3	E	(CH <sub>3</sub> ) <sub>2</sub> CHCH <sub>2</sub> CH <sub>2</sub>	-	H	H
(49)	Ir	3	E	C <sub>5</sub> H <sub>11</sub>	-	H	C <sub>4</sub> F <sub>9</sub>
(50)	Ir	3	E	C <sub>6</sub> H <sub>13</sub>	-	H	H
(31)	Ir	3	E	C <sub>6</sub> H <sub>13</sub>	-	H	Br
(52)	Ir	3	E	C <sub>6</sub> H <sub>13</sub>	-	NO <sub>2</sub>	H
(53)	Ir	3	E	C <sub>8</sub> H <sub>17</sub>	-	H	H
(54)	Ir	3	E	C <sub>9</sub> H <sub>19</sub>	-	OCH <sub>2</sub> C≡CCH <sub>3</sub>	H
(55)	Ir	3	E	C <sub>10</sub> H <sub>21</sub>	-	H	H
(56)	Ir	3	E	C <sub>10</sub> H <sub>21</sub>	-	OCH <sub>2</sub> CH=CH <sub>2</sub>	H
(57)	Ir	3	F	H	-	OCH <sub>3</sub>	H
(58)	Ir	3	F	CH <sub>3</sub>	-	H	H
(59)	Ir	3	F	CH <sub>3</sub>	-	OCH <sub>3</sub>	H
(60)	Ir	3	F	C <sub>2</sub> H <sub>5</sub>	-	H	CF <sub>3</sub>

Table 11

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(81)	Ir	3	F	C <sub>6</sub> H <sub>13</sub>	-	OCH(CH <sub>3</sub> ) <sub>2</sub>	H
(82)	Ir	3	F	C <sub>8</sub> H <sub>17</sub>	-	Si(CH <sub>3</sub> ) <sub>2</sub> C <sub>8</sub> H <sub>17</sub>	H
(63)	Ir	3	G	H	-	OCH <sub>3</sub>	H
(64)	Ir	3	G	H	-	H	CF <sub>3</sub>
(65)	Ir	3	G	H	-	O(CH <sub>2</sub> ) <sub>3</sub> OCH <sub>2</sub> C <sub>2</sub> F <sub>5</sub>	H
(66)	Ir	3	G	CH <sub>3</sub>	-	H	H
(67)	Ir	3	H	H	H	H	H
(68)	Ir	3	H	CH <sub>3</sub>	H	Si(CH <sub>3</sub> ) <sub>3</sub>	H
(69)	Ir	3	H	H	CH <sub>3</sub>	H	Cl
(70)	Ir	3	I	H	H	H	H
(71)	Ir	3	I	H	H	OCH <sub>3</sub>	H
(72)	Ir	3	I	H	H	H	CF <sub>3</sub>
(73)	Ir	3	I	H	H	H	CH <sub>3</sub>
(74)	Ir	3	I	C <sub>2</sub> H <sub>5</sub>	H	COOC <sub>2</sub> H <sub>5</sub>	H
(75)	Ir	3	I	H	C <sub>5</sub> H <sub>11</sub>	OCH <sub>2</sub> CH=CH <sub>2</sub>	H
(76)	Ir	3	J	H	-	H	H

Table continued

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(77)	Ir	3	J	H	-	NO <sub>2</sub>	H
(78)	Ir	3	J	CH <sub>3</sub>	-	OCH <sub>3</sub>	H
(79)	Ir	3	K	H	-	H	H
(80)	Ir	3	K	H	-	H	Si(CH <sub>3</sub> ) <sub>3</sub>
(81)	Ir	3	K	C <sub>3</sub> H <sub>7</sub>	-	H	CF <sub>3</sub>
(82)	Ir	3	L	H	H	H	H
(83)	Ir	3	L	CH <sub>3</sub>	H	SC <sub>2</sub> H <sub>5</sub>	H
(84)	Ir	3	L	H	CH <sub>3</sub>	OC <sub>6</sub> H <sub>13</sub>	H
(85)	Ir	3	M	H	H	H	H
(86)	Ir	3	M	C <sub>2</sub> H <sub>5</sub>	H	COOC <sub>3</sub> H <sub>7</sub>	H
(87)	Ir	3	M	H	C <sub>2</sub> H <sub>5</sub>	H	O(CH <sub>2</sub> ) <sub>3</sub> C <sub>2</sub> F <sub>5</sub>
(88)	Ir	3	N	-	H	H	H
(89)	Ir	3	N	-	C <sub>2</sub> H <sub>5</sub>	H	NO <sub>2</sub>
(90)	Ir	3	N	-	C <sub>6</sub> H <sub>13</sub>	a	H

Table 12

No	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(91)	Ir	3	O	H	-	H	H
(92)	Ir	3	O	H	-	H	Si(C <sub>2</sub> H <sub>5</sub> ) <sub>3</sub>
(93)	Ir	3	O	C <sub>8</sub> H <sub>17</sub>	-	OCH(CH <sub>3</sub> ) <sub>2</sub>	H
(94)	Ir	3	P	H	-	H	H
(95)	Ir	3	P	C <sub>3</sub> H <sub>7</sub>	-	H	COOCH <sub>3</sub>
(96)	Ir	3	P	C <sub>6</sub> H <sub>13</sub>	-	H	H
(97)	Ir	3	O	H	-	H	H
(98)	Ir	3	O	C <sub>4</sub> H <sub>8</sub>	-	O(CH <sub>2</sub> ) <sub>3</sub> CH=CH <sub>2</sub>	H
(99)	Ir	3	R	-	-	H	H
(100)	Ir	3	R	-	-	H	CF <sub>3</sub>
(101)	Ir	3	S	-	-	H	H
(102)	Ir	3	S	-	-	OC <sub>2</sub> H <sub>5</sub>	H
(100)	Ir	3	T	H	-	H	Br
(103)	Ir	3	T	C <sub>2</sub> H <sub>5</sub>	-	H	H
(105)	Ir	3	U	-	-	H	H
(106)	Ir	3	U	-	-	H	C <sub>7</sub> F <sub>15</sub>
(107)	Ir	3	V	H	-	H	H
(108)	Ir	3	W	-	-	OCH <sub>2</sub> C≡CCH <sub>3</sub>	H
(109)	Ir	3	x	CH <sub>3</sub>	-	H	H
(110)	Ir	3	Z	-	H	O(CH <sub>2</sub> ) <sub>2</sub> CH(CH <sub>3</sub> ) <sub>2</sub>	H
(111)	Ir	3	Z	-	C <sub>3</sub> H <sub>7</sub>	H	H

Table continued

No	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(112)	Ir	3	A'	H	H	H	H
(113)	Ir	3	B'	H	-	H	NO <sub>2</sub>
(114)	Ir	3	B'	CH <sub>3</sub>	-	H	H
(115)	Ir	3	C'	H	C <sub>9</sub> H <sub>19</sub>	OCH <sub>3</sub>	H
(116)	Pt	2	A	-	-	H	H
(117)	Pt	2	B	H	-	H	H
(118)	Pt	2	B	H	-	H	C <sub>4</sub> F <sub>9</sub>
(119)	Pt	2	B	CH <sub>3</sub>	-	OCH <sub>3</sub>	H
(120)	Pt	2	B	C <sub>3</sub> H <sub>7</sub>	-	H	CF <sub>3</sub>

Table 13

No	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(121)	Pt	2	B	C <sub>8</sub> H <sub>17</sub>	-	H	H
(122)	Pt	2	C	H	H	H	H
(123)	Pt	2	C	H	H	H	CF <sub>3</sub>
(124)	Pt	2	C	CH <sub>3</sub>	CH <sub>3</sub>	H	H
(125)	Pt	2	C	C <sub>2</sub> H <sub>5</sub>	H	H	H
(126)	Pt	2	C	C <sub>10</sub> H <sub>21</sub>	H	OCH <sub>3</sub>	H
(127)	Pt	2	D	-	-	H	H
(128)	Pt	2	E	H	-	H	H
(129)	Pt	2	E	CH <sub>3</sub>	-	H	H
(130)	Pt	2	E	CH <sub>3</sub>	-	H	H
(131)	Pt	2	E	CH <sub>3</sub>	-	H	NO <sub>2</sub>
(132)	Pt	2	E	C <sub>6</sub> H <sub>13</sub>	-	OC <sub>2</sub> H <sub>5</sub>	H
(133)	Pt	2	F	CH <sub>3</sub>	-	H	H
(134)	Pt	2	F	C <sub>2</sub> H <sub>5</sub>	-	H	CF <sub>3</sub>
(135)	Pt	2	G	H	-	H	H
(136)	Pt	2	G	H	-	H	Si(CH <sub>3</sub> ) <sub>3</sub>
(137)	Pt	2	G	C <sub>4</sub> H <sub>9</sub>	-	H	CH <sub>3</sub>
(138)	Pt	2	H	H	C <sub>6</sub> H <sub>13</sub>	H	H
(139)	Pt	2	I	H	H	H	H
(140)	Pt	2	I	C <sub>2</sub> H <sub>5</sub>	H	H	Si(C <sub>2</sub> H <sub>5</sub> ) <sub>3</sub>
(141)	Pt	2	J	-	H	H	H
(142)	Pt	2	K	C <sub>5</sub> H <sub>11</sub>	-	H	H
(143)	Pt	2	L	C <sub>8</sub> H <sub>17</sub>	H	SC <sub>2</sub> H <sub>5</sub>	H
(144)	Pt	2	N	-	H	H	H
(145)	Pt	2	O	H	-	H	H
(146)	Pt	2	P	H	-	H	H



Table continued

No	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(147)	Pt	2	O	H	-	H	CH <sub>3</sub>
(148)	Pt	2	R	-	-	H	H
(149)	Pt	2	U	-	-	H	H
(130)	Pt	2	V	H	-	NO <sub>2</sub>	H

Table 14

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(151)	Pt	2	W	-	-	H	H
(152)	Pt	2	X	CH <sub>3</sub>	-	H	H
(153)	Pt	2	Z	-	H	H	H
(154)	Pt	2	A'	H	H	H	H
(155)	Pt	2	B'	H	-	OCH <sub>3</sub>	H
(156)	Pt	2	C'	H	H	H	CF <sub>3</sub>
(157)	Rh	3	B	H	-	H	Br
(158)	Rh	3	B	H	-	OC <sub>6</sub> H <sub>13</sub>	H
(159)	Rh	3	B	CH <sub>3</sub>	-	H	H
(160)	Rh	3	C	H	H	H	H
(161)	Rh	3	C	H	H	OCH <sub>3</sub>	H
(162)	Rh	3	C	H	H	NO <sub>2</sub>	H
(163)	Rh	3	C	H	CH <sub>3</sub>	H	H
(164)	Rh	3	C	C <sub>6</sub> H <sub>13</sub>	H	H	Si(CH <sub>3</sub> ) <sub>3</sub>
(165)	Rh	3	D	-	-	H	H
(166)	Rh	3	E	H	-	COOC <sub>2</sub> H <sub>5</sub>	H
(167)	Rh	3	E	CH <sub>3</sub>	-	H	H
(168)	Rh	3	E	CH <sub>3</sub>	-	H	O(CH <sub>2</sub> ) <sub>6</sub> C <sub>2</sub> F <sub>5</sub>
(169)	Rh	3	E	C <sub>3</sub> H <sub>7</sub>	-	H	H
(170)	Rh	3	E	C <sub>10</sub> H <sub>21</sub>	-	H	H
(171)	Rh	3	F	C <sub>8</sub> H <sub>17</sub>	-	H	H
(172)	Rh	3	C	H	-	OCH <sub>2</sub> CH=CH <sub>2</sub>	H
(173)	Rh	3	G	CH <sub>3</sub>	-	H	CF <sub>3</sub>
(174)	Rh	3	H	H	H	H	H
(175)	Rh	3	I	H	H	H	H
(176)	Rh	3	K	C <sub>2</sub> H <sub>5</sub>	-	Cl	H
(177)	Rh	3	M	H	H	H	H
(178)	Rh	3	N	-	H	H	H
(179)	Rh	3	P	CH <sub>3</sub>	-	H	NO <sub>2</sub>
(180)	Rh	3	S	-	-	H	H

Table 15

No.	M	n	Y	R <sub>1</sub>	R <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
(181)	Rh	3	V	H	-	H	H
(182)	Rh	3	X	H	-	SC <sub>5</sub> H <sub>11</sub>	H
(183)	Rh	3	C	H		OC <sub>7</sub> H <sub>15</sub>	H
(184)	Pd	2	B	C <sub>6</sub> H <sub>13</sub>	-	H	H
(185)	Pd	2	C	H	H	OCH <sub>3</sub>	H
(186)	Pd	2	C	H	H	H	H
(187)	Pd	2	D	-	-	H	H
(188)	Pd	2	E	H	-	H	CF <sub>3</sub>
(189)	Pd	2	E	CH <sub>3</sub>	-	H	H
(190)	Pd	2	F	C <sub>3</sub> H <sub>7</sub>	-	H	H
(191)	Pd	2	G	H	-	H	H
(192)	Pd	2	G	H	-	Si(CH <sub>3</sub> ) <sub>3</sub>	H
(193)	Pd	2	I	CH <sub>3</sub>	H	NO <sub>2</sub>	H
(194)	Pd	2	J	-	H	H	H
(195)	Pd	2	L	H	H	H	H
(196)	Pd	2	M	H	H	C <sub>4</sub> F <sub>9</sub>	H
(197)	Pd	2	O	H	-	H	C <sub>4</sub> H <sub>9</sub>
(198)	Pd	2	T	H	-	H	H
(199)	Pd	2	W	-	-	OCH <sub>3</sub>	OCH <sub>3</sub>
(200)	Pd	2	A'	CH <sub>3</sub>	H	H	Cl

[0090] Hereinbelow, the present invention will be described more specifically based on Examples with reference to the drawing.

#### Examples I-1 - I-10

[0091] In these examples, metal coordination compounds of formula (1) (Ex. Comp. Nos. (1-4), (I-7), (I-17), (I-18), (I-21), (I-23), (I-32), (I-56), (1-67) and (1-74) were used in respective luminescence layers for Examples I-1 - 1-10, respectively.

[0092] Each of luminescence devices having a structure shown in Figure 1B were prepared in the following manner.

[0093] On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm<sup>2</sup>.

[0094] On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10<sup>-4</sup> Pa).

Organic layer 1 (hole transport layer 13) (40 nm):  $\alpha$ -NPD

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (1) (95: 5 by weight)

Organic layer 3 (electron transport layer 16) (30 nm): Alq<sub>3</sub>

Metal electrode layer 1 (metal electrode 11) (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11) (100 nm): Al


[0095] Each of the thus-prepared luminescence devices was taken out of the vacuum chamber and was subjected to a continuous energization test in an atmosphere of dry nitrogen gas stream so as to remove device deterioration factors, such as oxygen and moisture (water content).

[0096] The continuous energization test was performed by continuously applying a voltage at a constant current density of 70 mA/cm<sup>2</sup> to the luminescence device having the ITO (transparent) electrode (as an anode) and the Al (metal) electrode (as a cathode), followed by measurement of luminance (brightness) with time so as to determine a time (luminance half-life) required for decreasing an initial luminance (70 - 120 cd/m<sup>2</sup>) to 1/2 thereof.

[0097] The results are shown in Table 16 appearing hereinafter.

#### Comparative Example I-1

[0098] A comparative luminescence device was prepared and evaluated in the same manner as in Example I-1 - 1-10 except that the metal coordination compound of formula (1) was changed to Ir-phenylpyrimidine complex (Ir(ppy)<sub>3</sub>) shown below.



[0099] The results are shown in Table 16 below.

Table 16

Ex. No.	Ex.Comp. No.	Luminance half-life (Hr)
I-1*	(I-4)	750
I-2*	(I-7)	500
I-3*	(I-17)	900
I-4*	(I-18)	850
I-5*	(I-21)	850
I-6*	(I-23)	500
I-7*	(I-32)	600
I-8	(I-56)	700
I-9	(I-67)	400
I-10	(I-74)	450
Comp.Ex. I-1	Ir(ppy) <sub>3</sub>	350

\* Reference Example

[0100] As is apparent from Table 16, compared with the conventional luminescence device using Ir(ppy)<sub>3</sub>, the luminescence devices using the metal coordination compounds of formula (1) according to the present invention provide longer luminance half-lives, thus resulting in an EL device having a high durability (luminance stability) based on a good stability of the metal coordination compound of formula (1) of the present invention.

#### Examples I-11 I-13

[0101] In these examples, metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49) were used in respective luminescence layers for Examples I-11 - I-13, respectively.

[0102] Each of luminescence devices having a structure shown in Figure 1C were prepared in the following manner.

[0103] On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm<sup>2</sup>.

[0104] On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10<sup>-4</sup> Pa).

Organic layer 1 (hole transport layer 13) (40 nm):  $\alpha$ -NPD

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (1) (93: 7 by weight)

Organic layer 3 (exciton diffusion prevention layer 17) (10 nm): BCP

Organic layer 4 (electron transport layer 16) (30 nm): Alq3

Metal electrode layer 1 (metal electrode 11) (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11) (100 nm): Al

[0105] Separately, each of the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) for the thus-prepared luminescence devices was subjected to measurement of photoluminescence spectrum in order to evaluate a luminescent characteristic of the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)). Specifically, each of the metal coordination compounds was dissolved in toluene at a concentration of  $10^{-4}$  mol/l and subjected to measurement of photo-luminescence spectrum at 25 °C by using excited light (ca. 350 nm) and a spectrophoto-fluorometer ("Model F4500", mfd. by Hitachi K.K.).

[0106] The results are shown in Table 17 appearing hereinafter.

[0107] The values of photoluminescence spectrum of the metal coordination compounds (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were substantially equivalent to those in the luminescence devices under voltage application as shown in Table 17, whereby it was confirmed that luminescence caused by the luminescence device was based on luminescence of the metal coordination compound used.

[0108] EL characteristics of the luminescence devices using the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were measured by using a microammeter ("Model 4140B", mfd. by Hewlett-Packard Co.) for a current density under application of a voltage of 12 volts (current-voltage characteristic), using a spectrophoto-fluorometer ("Model SR1", mfd. by Topcon K.K.) for a peak emission wavelength  $\lambda_{PE}$  (luminescence spectrum), and using a luminance meter ("Model BM7", mfd. by Topcon K.K.) for a luminescence efficiency (luminescence luminance). Further, an energy conversion efficiency was obtained according to the following equation:

**Energy conversion efficiency (lm/W)**


$$= (\pi \times \text{luminescence efficiency} \\ (\text{cd/A})) / \text{applied voltage (V)}.$$

[0109] All the above-prepared luminescence devices showed a good rectification characteristic.

[0110] The results are shown in Table 17.

#### Comparative Example 1-2

[0111] A comparative luminescence device was prepared and evaluated in the same manner as in Example I-2 - I-13 except that the metal coordination compound of formula (1) was changed to Ir-phenylpyrimidine complex (Ir(ppy)<sub>3</sub>) shown below.



[0112] The results are shown in Table 17 below.

Table 17

Ex.No	Ex.Comp.No.	$\lambda$ PE in toluene (nm)	$\lambda$ PE (nm)	Energy conversion efficiency (lm/W)	Luminescence efficiency (cd/A)	Current density (mA/cm <sup>2</sup> at 12V)	Luminance half-life (Hr)
I-11 *	(I-1)	522	525	4.0	13.6	170	300
I-12 *	(I-32)	487	525	0.4	2.4	130	400
I-13 *	(I-49)	537	545	2.1	7.0	25	250
Comp.Ex.1-2	Ir(ppy) <sub>3</sub>	510	510	6.0	19.0	20	150

\* Reference Example

[0113] As shown in Table 17, compared with the luminescence device using Ir(ppy)<sub>3</sub> (Comparative Example 1-2) showing  $\lambda_{PE} = 510$  nm, the luminescence devices using the metal coordination compound of formula (1) according to the present invention showed longer peak emission wavelengths ( $\lambda_{PE} = 525 - 545$  nm) by 15 - 35 nm, thus resulting in smaller relative luminous efficiencies.


[0114] Smaller energy conversion efficiencies (0.4 - 4.0 lm/W) and luminescence efficiencies (2.4 - 13.6 cd/A) of the luminescence devices of the present invention compared with those (6.0 lm/W and 19.0 cd/A) of the luminescence

device using Ir(ppy)<sub>3</sub> may be attributable to the smaller relative luminous efficiencies due to the longer peak emission wavelengths, thus not resulting in essentially inferior luminescent characteristics of the luminescence devices using the metal coordination compound of formula (1) of the present invention.

[0115] As apparent from the results of the luminance half-lives of the luminescence devices, compared with the luminescence device using Ir(ppy)<sub>3</sub> showing the luminance half-life of 150 hours, the luminescence devices using the metal coordination compounds of formula (1) according to the present invention showed considerably longer luminance half-lives of 250 - 400 hours.


Reference Example I-14 (Synthesis of Ex. Comp. No. (I-1))

[0116]



[0117] In a 1 liter-three necked flask, 20.0 g (126.6 mM) of 2-bromopyridine, 17.7 g (126.4 mM) of 3-fluorophenylboronic acid, 130 ml of toluene, 65 ml of ethanol and 130 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.60 g (3.98 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 6 hours under stirring in nitrogen gas stream.

[0118] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/ethyl acetate = 5/1) to obtain 6.0 g of 2-(3-fluorophenyl)pyridine (pale brown liquid) (Yield: 34.6 %).

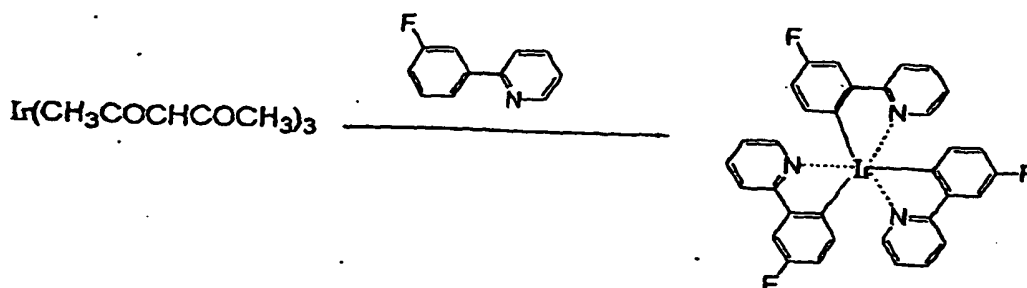


[0119] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140°C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100°C by standing. To glycerol, 1.04 g (6.00 mM) of 2-(3-fluorophenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

[0120] After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.22 g of Iridium (III) tris[2-(3-fluorophenyl)pyridine] (yellow powder) (Yield: 31.0 %).


Reference Example I-15 (Synthesis of Ex. Comp. No. (I-32))

[0121]

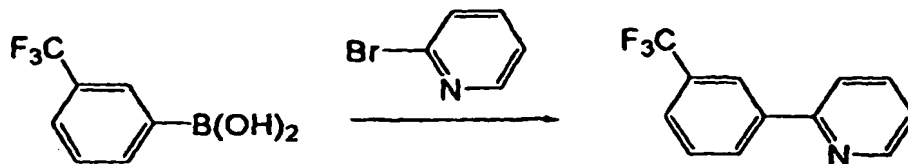

[0122] In a 1 liter-three necked flask, 20.8 g (131.6 mM) of 2-bromopyridine, 25.0 g (131.6 mM) of 3-trifluoromethylphenylboronic acid, 130 ml of toluene, 65 ml of ethanol and 130 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.76 g (4.12 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 7 hours under stirring in nitrogen gas stream.

[0123] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue (pale brown liquid). The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 1/1) to obtain 6.0 g of 2-(3-(trifluoromethyl)phenyl)pyridine (pale brown liquid) (Yield: 21.1%).

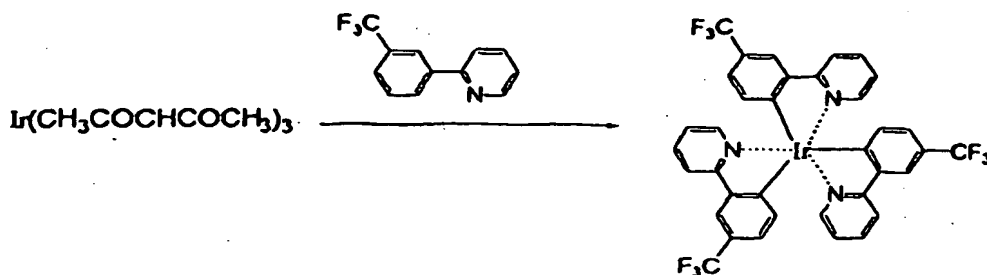


[0124] In a 200 ml-four necked flask, 100 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 2.68 g (12.0 mM) of 2-(3-(trifluoromethyl)phenyl)pyridine and 1.00 g (2.04 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

[0125] After the reaction, the reaction mixture was cooled to room temperature and poured into 600 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure. The precipitate was dissolved in chloroform and the insoluble matter was removed by filtration, followed by purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.62 g of Iridium (III) tris[2-(3-(trifluoromethyl)phenyl)-pyridine] (yellow powder) (Yield: 35.3 %), which showed a peak emission wavelength  $\lambda_{\text{PE}}$  in toluene at 25 °C of 487 nm.

Reference Example 1-16 (Synthesis of Ex. Comp. No. (I-49))


[0126]



[0127] In a 1 liter-three necked flask, 25.6 g (141.0 mM) of 2-chloro-5-trifluoromethylpyridine, 17.2 g (141.0 mM) of phenylboronic acid, 140 ml of toluene, 70 ml of ethanol and 140 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 5.10 g (4.41 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 6 hours under stirring in nitrogen gas stream.

[0128] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene. The

organic layer was washed with water until the system showed neutral, followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 5/1). The resultant creamy crystal was purified by alumina column chromatography (eluent: toluene) and recrystallized from ethanol to obtain 13.1 g of 2-phenyl-5-trifluoromethylpyridine (colorless crystal) (Yield: 41.6 %).

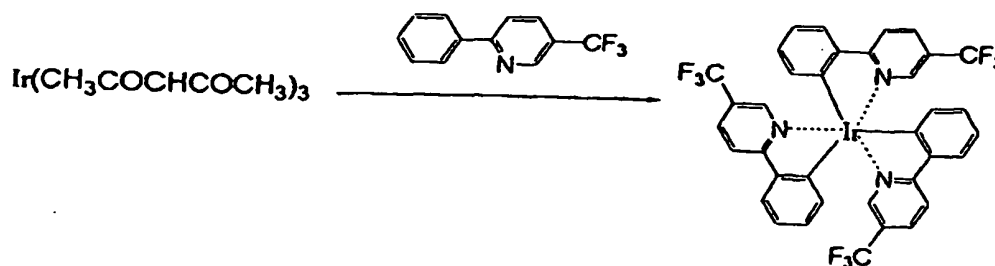


**[0129]** In a 200 ml-four necked flask, 100 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 2.68 g (12.0 mM) of 2-phenyl-5-trifluoromethylpyridine and 1.00 g (2.04 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 8 hours under stirring in nitrogen gas stream.

**[0130]** After the reaction, the reaction mixture was cooled to room temperature and poured into 600 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 4 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.43 g of Iridium (III) tris-(2-phenyl-5-trifluoromethylpyridine) (orange powder) (Yield: 24.5 %).


Reference Example I-17. (Synthesis of Ex. Comp. No. (I-122))

**[0131]**



**[0132]** In a 100 ml-three necked flask, 3.16 g (19.9 mM) of 2-bromopyridine, 3.16 g (20.0 mM) of 2,4-difluorophenylboronic acid, 15 ml of toluene, 7.5 ml of ethanol and 15 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 0.72 g (0.62 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 8 hours and 40 minutes under stirring in nitrogen gas stream.

**[0133]** After the reaction, the reaction mixture was cooled, followed by extraction with cool water and ethyl acetate. The organic layer was washed with water followed by distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/ethyl acetate = 10/1) to obtain 3.28 g of 2-(2,4-difluorophenyl)pyridine (pale yellow oily product) (Yield: 86.0 %).

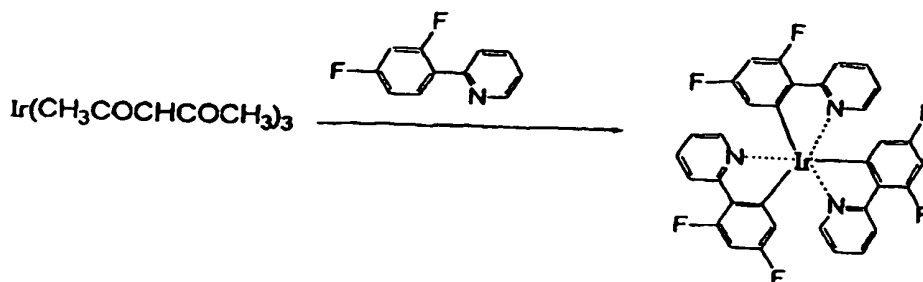




[0134] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100°C by standing. To glycerol, 0.96 g (5.02 mM) of 2-(2,4-difluorophenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

[0135] After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.25 g of Iridium (III) tris[2-(4,6-difluorophenyl)-pyridine] (yellow powder) (Yield: 32.1 %), which showed a peak emission wavelength  $\lambda_{PE}$  in toluene at 25°C of 471 nm.

#### Example I-18 (Synthesis of Ex. Comp. No. (I-121))


[0136]

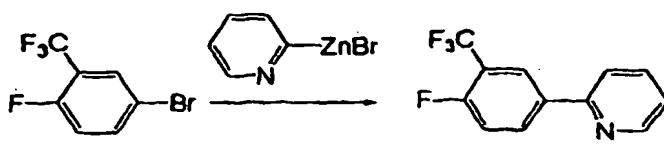

[0137] In a 500 ml-three necked flask, 11.0 g (45.3 mM) of 5-bromo-2-fluorobenzotrifluoride and 90 ml of dry tetrahydrofuran (THF) were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 2.60 g (2.25 mM) of tetrakis(triphenylphosphine) palladium (0) was added, followed by cooling to 20 - 21 °C (inner temperature) on an ice bath in nitrogen gas stream. At that temperature, 90 ml of 0.5 M-THF solution of 2-pyridylzinc bromide was gradually added dropwise to the mixture in nitrogen gas stream, followed by stirring for 4 hours at that temperature.

[0138] After the reaction, the reaction mixture was poured into cool water, followed by addition of ethyl acetate to remove the insoluble matter by filtration. The organic layer was washed with water and dried with anhydrous sodium sulfate, followed by distilling-off of the solvent under reduced pressure to obtain a residue.

[0139] The residue was purified by silica gel column chromatography (eluent: hexane/ethyl acetate = 20/1) to obtain 1.80 g of 2-(4-fluoro-3-trifluoromethylphenyl)pyridine (pale brown oily product) (Yield: 16.6 %).

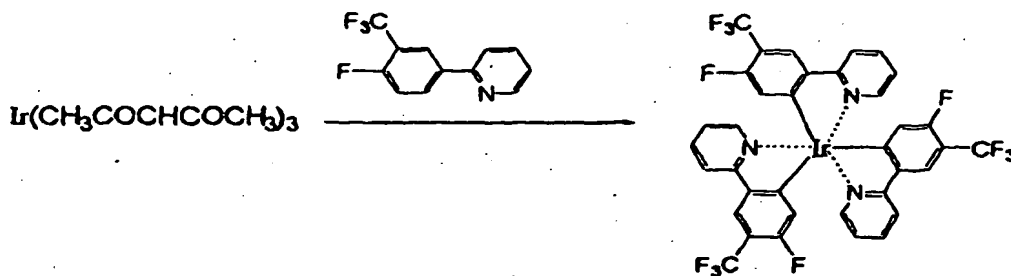


[0140] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.21 g (5.02 mM) of 2-(4-fluoro-3-trifluoromethylphenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 10 hours under stirring in nitrogen gas stream.

[0141] After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/methanol) to obtain 0.20 g of Iridium (III) tris[2-(4-fluoro-3-trifluoromethylphenyl)pyridine] (yellow powder) (Yield: 21.5 %), which showed a peak emission wavelength  $\lambda_{PE}$  in toluene at 25 °C of 466 nm.


#### Example 1-19 (Synthesis of Ex. Comp. No. (I-111))

[0142]



[0143] In a 500 ml-three necked flask, 11.8 g (45.5 mM) of 5-bromo-2-chlorobenzotrifluoride and 90 ml of dry tetrahydrofuran (THF) were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 2.60 g (2.25 mM) of tetrakis(triphenylphosphine) palladium (0) was added, followed by cooling to 13.5 - 14 °C (inner temperature) on an ice bath in nitrogen gas stream. At that temperature, 90 ml of 0.5 M-THF solution of 2-pyridylzinc bromide was gradually added dropwise to the mixture in nitrogen gas stream, followed by stirring for 3 hours at ca. 20 °C.

[0144] After the reaction, the reaction mixture was poured into cool water, followed by addition of ethyl acetate to remove the insoluble matter by filtration. The organic layer was washed with water and dried with anhydrous sodium sulfate, followed by distilling-off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: hexane/ethyl acetate = 10/1) to obtain 3.70 g of 2-(4-chloro-5-trifluoromethylphenyl)pyridine (pale brown oily product) (Yield: 31.9 %).

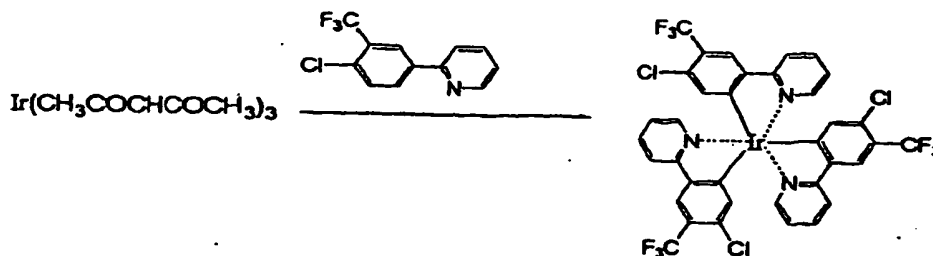

[0145] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.29 g (5.01 mM) of 2-(4-chloro-3-trifluoromethylphenyl)pyridine and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 8 hours under stirring in nitrogen gas stream.

[0146] After the reaction, the reaction mixture was cooled to room temperature and poured into 300 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by drying for 5 hours at 100 °C under reduced pressure and purification by silica gel column chromatography (eluent: chloroform) and recrystallization from a mixture solvent (chloroform/hexane) to obtain 0.25 g of Iridium (III) tris[2-(4-chloro-3-trifluoromethylphenyl)pyridine] (yellow powder) (Yield: 25.4 %), which showed a peak emission wavelength  $\lambda_{PE}$  in toluene at 25 °C of 479 nm.

#### Comparative Example I-3 (Synthesis of metal coordination compound A)

[0147] A metal coordination compound A (iridium (III) tris[2-(4,5-difluoromethylphenyl)pyridine] described in Polymer Preprints, 41(1), pp. 770 - 771 (2000)) was prepared in the same manner as in Example 17 except that 2,4-difluorophenylbromic acid was changed to 3,4-difluorophenylbromic acid.

[0148] The metal coordination compound A showed a peak emission wavelength  $\lambda_{PE}$  in toluene at 25 °C of 505 nm.

#### Reference Example I-20 and Comparative Example I-4

[0149] Two luminescence devices were prepared and evaluated in the same manner as in Examples I-1 to I-10 except that the metal coordination compound was changed to one (Ex. Comp. No. (122)) prepared in Example I-18 (for Example I-20) and the metal coordination compound A prepared in Comparative

Example 3 (for Comparative Example 4), respectively.

[0150] The results are shown in Table 18 below.

Table 18

Ex. No.	Ex. Comp. No.	Luminance half-life (Hr)
I-20*	(I-122)	630
Comp.Ex. 1-4	Metal coordination compound A	310
* Reference Example		

[0151] As apparent from Table 18, the luminescence device using the metal coordination compound of formula (1) according to the present invention exhibited a luminance half-life considerably longer than that of the luminescence device using the metal coordination compound A, thus resulting in an EL device excellent in durability (luminance stability).

[0152] As described hereinabove, the metal coordination compound of formula (1) according to the present invention provides a higher phosphorescence efficiency and a shorter phosphorescence life and allows control of its emission wavelength by appropriately modifying the substituents X1 to X8, thus being suitable as a luminescent material for EL device.

[0153] The result EL device (luminescence device) having an organic layer containing the metal coordination compound of formula (1) exhibits excellent characteristics including a high efficiency luminescence, a high luminance for a long period, and a decreased luminescence deterioration in energized state.

#### Examples II-1 - II-15

[0154] In these examples, metal coordination compounds of formula (1) (Ex. Comp. Nos. (II-10), (II-15), (II-17), (II-21), (II-39), (II-43), (II-46), (II-85), (II-96), (II-122), (II-131), (II-146), (II-163), (II-177) and (II-182) were used in respective luminescence layers for Examples II-1 - II-15, respectively.

[0155] Each of luminescence devices having a structure shown in Figure 1B were prepared in the following manner.

[0156] On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm<sup>2</sup>.

[0157] On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10<sup>-4</sup> Pa).

Organic layer 1 (hole transport layer 13) (40 nm):  $\alpha$ -NPD

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (2) (95: 5 by weight)

Organic layer 3 (electron transport layer 16) (30 nm): Alq3

Metal electrode layer 1 (metal electrode 11) (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11) (100 nm): Al


[0158] Each of the thus-prepared luminescence devices was taken out of the vacuum chamber and was subjected to a continuous energization test in an atmosphere of dry nitrogen gas stream so as to remove device deterioration factors, such as oxygen and moisture (water content).

[0159] The continuous energization test was performed by continuously applying a voltage at a constant current density of 70 mA/cm<sup>2</sup> to the luminescence device having the ITO (transparent) electrode (as an anode) and the Al (metal) electrode (as a cathode), followed by measurement of luminance (brightness) with time so as to determine a time (luminance half-life) required for decreasing an initial luminance (60 - 220 cd/m<sup>2</sup>) to 1/2 thereof.

[0160] The results are shown in Table 19 appearing hereinafter.

#### Comparative Example II-1

[0161] A comparative luminescence device was prepared and evaluated in the same manner as in Example II-1 - II-15 except that the metal coordination compound of formula (2) was changed to Ir-phenylpyrimidine complex (Ir(ppy)<sub>3</sub>) shown below.



[0162] The results are shown in Table 19 below.

Table 19

Ex. No.	Ex.Comp. No.	Luminance half-life (Hr)
II-1	(II-10)	750
II-2	(II-15)	950
II-3	(II-17)	800
II-4	(II-21)	850
II-5	(II-39)	900
II-6	(II-43)	750
II-7	(II-46)	900
II-8	(II-85)	500
II-9	(II-96)	650
II-10	(II-122)	650
II-11	(II-131)	600
II-12	(II-146)	550
II-13	(II-163)	600
II-14	(II-177)	450
II-15	(II-182)	450
Comp.Ex. II-1	Ir(ppy) <sub>3</sub>	350

[0163] As is apparent from Table 19, compared with the conventional luminescence device using Ir(ppy)<sub>3</sub>, the luminescence devices using the metal coordination compounds of formula (2) according to the present invention provide longer luminance half-lives, thus resulting in an EL device having a high durability (luminance stability) based on a good stability of the metal coordination compound of formula (2) of the present invention.

#### Examples II-16 - II-17

[0164] In these examples, metal coordination compounds of formula (2) (Ex. Comp. Nos. II-15 and II-17 were used in respective luminescence layers for Examples II-16 - II-17, respectively.

[0165] Each of luminescence devices having a structure shown in Figure 1C were prepared in the following manner.  
 [0166] On a glass substrate (transparent substrate 15), a 100 nm-thick film (transparent electrode 14) of ITO (indium tin oxide) was formed by sputtering, followed by patterning to have an (opposing) electrode area of 3 mm<sup>2</sup>.

[0167] On the ITO-formed substrate, three organic layers and two metal electrode layers shown below were successively formed by vacuum (vapor) deposition using resistance heating in a vacuum chamber (10<sup>-4</sup> Pa).

Organic layer 1 (hole transport layer 13) (40 nm): α-NPD

Organic layer 2 (luminescence layer 12) (20 nm): mixture of CBP: metal coordination compound of formula (2) (93: 7 by weight)

Organic layer 3 (exciton diffusion prevention layer 17) (10 nm): BCP

Organic layer 4 (electron transport layer 16) (30 nm): Alq<sub>3</sub>

Metal electrode layer 1 (metal electrode 11) (15 nm): Al-Li alloy (Li = 1.8 wt. %)

Metal electrode layer 2 (metal electrode 11) (100 nm): Al

[0168] Separately, each of the metal coordination compounds of formula (2) (Ex. Comp. Nos. (II-15 and (II-17))) for the thus-prepared luminescence devices was subjected to measurement of photoluminescence spectrum in order to evaluate a luminescent characteristic of the metal coordination compounds of formula (2) (Ex. Comp. Nos. (II-15) and (II-17)). Specifically, each of the metal coordination compounds was dissolved in toluene at a concentration of  $10^{-4}$  mol/l and subjected to measurement of photoluminescence spectrum at 25 °C by using excited light (ca. 350 nm) and a spectrophoto-fluorometer ("Model F4500", mfd. by Hitachi K.K.).

[0169] The results are shown in Table 20 appearing hereinafter.

[0170] The values of photoluminescence spectrum of the metal coordination compounds (Ex. Comp. Nos. (II-15) and (II-17)) were substantially equivalent to those in the luminescence devices under voltage application as shown in Table 20, whereby it was confirmed that luminescence caused by the luminescence device was based on luminescence of the metal coordination compound used.

[0171] EL characteristics of the luminescence devices using the metal coordination compounds of formula (1) (Ex. Comp. Nos. (I-1), (I-32) and (I-49)) were measured by using a microammeter ("Model 4140B", mfd. by Hewlett-Packard Co.) for a current density under application of a voltage of 12 volts (current-voltage characteristic), using a spectrophotofluorometer ("Model SR1", mfd. by Topcon K.K.) for a peak emission wavelength  $\lambda_{PE}$  (luminescence spectrum), and using a luminance meter ("Model BM7", mfd. by Topcon K.K.) for a luminescence efficiency (luminescence luminance). Further, an energy conversion efficiency was obtained according to the following equation:


$$\begin{aligned} &\text{Energy conversion efficiency (lm/W)} \\ &= (\pi \times \text{luminescence efficiency} \\ &\quad (\text{cd/A})) / \text{applied voltage (V)}. \end{aligned}$$

[0172] All the above-prepared luminescence devices showed a good rectification characteristic.

[0173] The results are shown in Table 20.

#### Comparative Example II-2

[0174] A comparative luminescence device was prepared and evaluated in the same manner as in Example II-16 - II-17 except that the metal coordination compound of formula (1) was changed to Ir-phenylpyrimidine complex (Ir(ppy)<sub>3</sub>) shown below.



[0175] The results are shown in Table 20 below.

Table 20

Ex.No	Ex.Comp.No.	$\lambda$ PE in toluene (nm)	$\lambda$ PE (nm)	Energy conversion efficiency (lm/W)	Luminescence efficiency (cd/A)	Current density (mA/cm <sup>2</sup> at 12V)	Luminance half-life (Hr)
II-16	(II-15)	524	565	0.9	7.5	70	250
II-17	(II-17)	554	565	3.4	9.8	180	300
Comp.Ex.II-2	Ir(ppy) <sub>3</sub>	510	510	6.0	19.0	20	150

[0176] As shown in Table 20, compared with the luminescence device using Ir(ppy)<sub>3</sub> (Comparative Example II-2) showing  $\lambda_{PE} = 510$  nm, the luminescence devices using the metal coordination compound of formula (2) according to the present invention showed longer peak emission wavelengths ( $\lambda_{PE} = 565$  nm) by 55 nm, thus resulting in smaller relative luminous efficiencies.


[0177] Smaller energy conversion efficiencies (0.9 - 3.4 lm/W) and luminescence efficiencies (7.5 - 9.6 cd/A) of the

luminescence devices of the present invention compared with those (6.0 lm/M and 19.0 cd/A) of the luminescence device using Ir(ppy)<sub>3</sub> may be attributable to the smaller relative luminous efficiencies due to the longer peak emission wavelengths, thus not resulting in essentially inferior luminescent characteristics of the luminescence devices using the metal coordination compound of formula (2) of the present invention.

[0178] As apparent from the results of the luminance half-lives of the luminescence devices, compared with the luminescence device using Ir(ppy)<sub>3</sub> showing the luminance half-life of 150 hours, the luminescence devices using the metal coordination compounds of formula (2) according to the present invention showed considerably longer luminance half-lives of 250 - 300 hours.


#### Example II-18 (Synthesis of Ex. Comp. No. (II-15))

[0179]




[0180] In a 5 liter-three necked flask, 169.5 g (1.28 M) of 1,2,3,4-tetrahydronaphthalene and 3 liters of acetic acid were placed and stirred at room temperature. Under stirring, to the mixture, 650 g (1.67 M) of benzyltrimethylammonium bromide and 244.8 g (1.80 M) of zinc chloride were successively added, followed by stirring for 5.5 hours at 70 °C. After the reaction, the reaction mixture was cooled to room temperature and poured into 3 liters of ice water, followed by extraction with methyl t-butyl ether. The organic layer was successively washed with 5 %-NaHSO<sub>3</sub> aqueous solution, 5 %-NaOH aqueous solution and distilled water, followed by distilling-off of the solvent under reduced pressure to obtain 243.2 g of a dark brown liquid. The liquid was subjected to vacuum distillation (distillation under reduced pressure) (boiling point = 108 - 110 °C at 667 Pa) to obtain 130.2 g of 6-bromo-1,2,3,4-tetrahydronaphthalene (Yield: 48.1 %).

[0181] In a 5 liter-three necked flask, 67.55 g of 6-bromo-1,2,3,4-tetrahydronaphthalene and 1480 ml of dry tetrahydrofuran (THF) were placed and cooled to -70 to -68 °C on a dry ice-acetone bath in a dry nitrogen gas atmosphere. At that temperature, to the mixture, 200 ml of 1.6 M-butyllithium solution in hexane was added dropwise, followed by stirring for 2 hours at -67 °C or below. To borate in 435 ml of dry THF was added dropwise at -70 to -68 °C, followed by stirring for 2 hours at -67 °C or below. The reaction mixture was gradually warmed to room temperature and left standing overnight. The resultant reaction mixture was gradually added dropwise to a mixture of 108 ml of HCl and 438 ml of water kept at 10 °C or below, followed by stirring for 1 hour at that temperature. Thereafter, the mixture was subjected to extraction with toluene. The organic layer was washed with water, followed by distilling-off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/ethyl acetate = 2/1) and recrystallized from hexane to obtain 30.4 g of 1,2,3,4-tetrahydronaphthalene-6-boronic acid (Yield: 54.0 %).

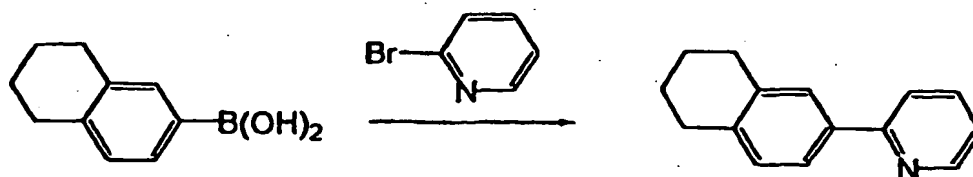

[0182] In a 1 liter-three necked flask, 17.8 g (114 mM) of 2-bromopyridine, 20.0 g (127 mM) of 1,2,3,4-tetrahydronaphthalene-6-boronic acid, 160 ml of toluene, 80 ml of ethanol and 160 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 4.05 g (3.5 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 7 hours under stirring in nitrogen gas stream.

[0183] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene, and distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 2/1) to obtain 9.2 g of 6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene (yellow liquid) (Yield: 38.6 %).

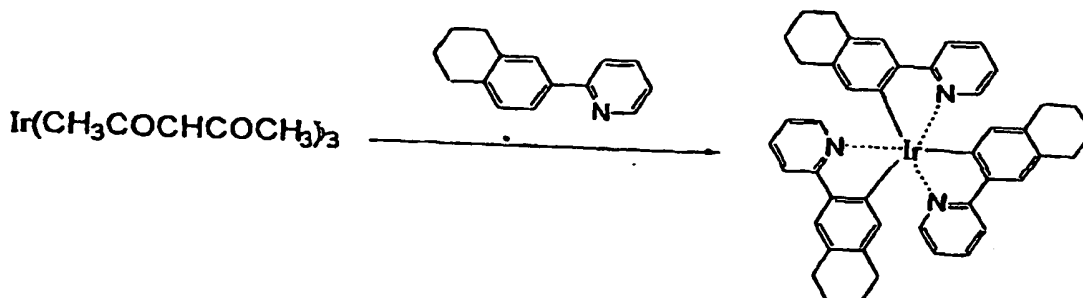


15 [0184] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.30 g (6.21 mM) of 6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 5 hours under stirring in nitrogen gas stream.

20 [0185] After the reaction, the reaction mixture was cooled to room temperature and poured into 100 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by washing with acetone and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.14 g of Iridium (III) tris[6-(pyridine-2-yl)-1,2,3,4-tetrahydronaphthalene] (orange powder) (Yield: 16.8 %).


Example II-19 (Synthesis of Ex. Comp. No. (II-17))

25 [0186]



35 [0187] In a 200 ml-four necked flask, 5.16 g (28.4 mM) of 2-chloro-5-trifluoromethyl, 5.00 g (28.4 mM) of 1,2,3,4-tetrahydronaphthalene-6-bonic acid, 25 ml of toluene, 12.5 ml of ethanol and 25 ml of 2M-sodium carbonate aqueous solution were placed and stirred in a nitrogen gas stream at room temperature. Under stirring, to the mixture, 1.02 g (0.88 mM) of tetrakis (triphenylphosphine) palladium (0) was added, followed by heat-refluxing for 3.25 hours under stirring in nitrogen gas stream.

40 [0188] After the reaction, the reaction mixture was cooled, followed by extraction with cool water and toluene, and distilling off of the solvent under reduced pressure to obtain a residue. The residue was purified by silica gel column chromatography (eluent: toluene/hexane = 1/1) and alumina column chromatography (eluent: toluene) and recrystallized from methanol to obtain 3.14 g of 6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene (colorless crystal) (Yield: 39.9 %).

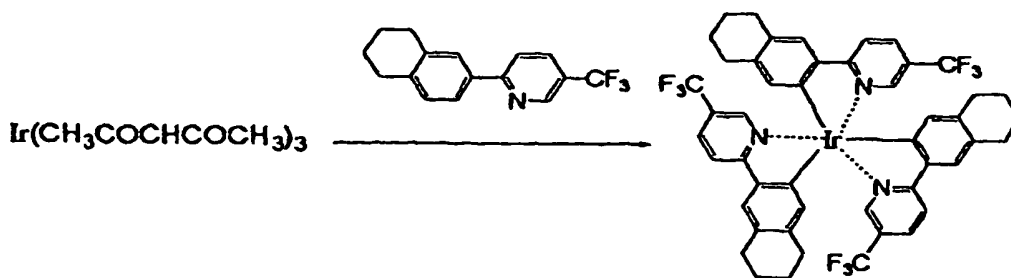

[0189] In a 100 ml-four necked flask, 50 ml of glycerol was placed and heat-stirred for 2 hours at 130 - 140 °C while



supplying nitrogen gas therein in the form of bubbles, followed by cooling to 100 °C by standing. To glycerol, 1.72 g (6.20 mM) of 6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene and 0.50 g (1.02 mM) of Iridium (III) acetylacetonate were added, followed by heat-refluxing for 7 hours under stirring in nitrogen gas stream.


[0190] After the reaction, the reaction mixture was cooled to room temperature and poured into 100 ml of 1N-HCl. The resultant precipitate was recovered by filtration and washed with water, followed by washing with acetone and purification by silica gel column chromatography (eluent: chloroform) to obtain 0.11 g of Iridium (III) tris[6-(5-trifluoromethylpyridine-2-yl)-1,2,3,4-tetrahydronaphthalene] (orange powder) (Yield: 10.5 %).

[0191] As described hereinabove, the metal coordination compound of formula (2) according to the present invention provides a higher phosphorescence efficiency and a shorter phosphorescence life and allows control of its emission wavelength by appropriately modifying the alkylene group Y and/or substituents X1 and X2, thus being suitable as a luminescent material for EL device.

[0192] The result EL device (luminescence device) having an organic layer containing the metal coordination compound of formula (2) exhibits excellent characteristics including a high efficiency luminescence, a high luminance for a long period, and a decreased luminescence deterioration in energized state. A luminescence device is principally constituted by a pair of electrodes and an organic compound layer disposed therebetween. The layer contains a metal coordination compound represented by the formula (1) or (2) as defined in the claims 12, 24 or 27.

## Claims

1. A luminescence device, comprising: an organic compound layer comprising a metal coordination compound represented by the following formula (1):

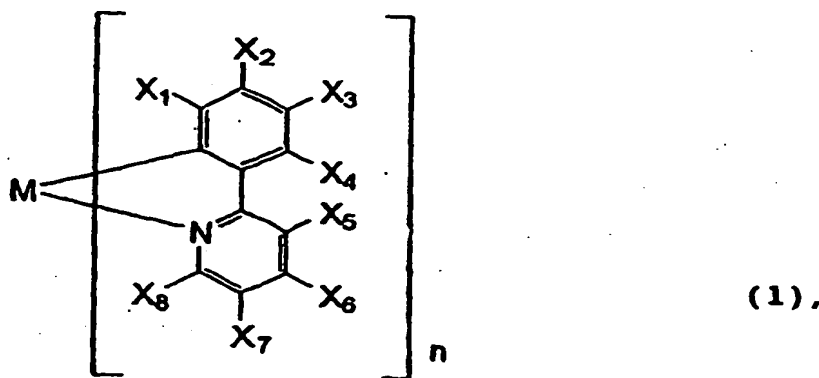


wherein M denotes Rh or Pd; n is 2 or 3; and X1 to X8 independently denote hydrogen atom or a substituent selected from the group consisting of a halogen atom; a nitro group; a trifluoromethyl group, a trialkylsilyl group having three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 2 - 20 carbon atoms in which said alkyl group includes one methylene group or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and in which said alkyl group includes a hydrogen atom which can be replaced with fluorine atom; with the proviso that at least one of X1 to X8 is a substituent other than hydrogen atom, and X2 and X3 cannot be fluorine atom at the same time.

2. A device according to claim 1, wherein at least two of X1 to X8 are substituents other than hydrogen atom.
3. A device according to claim 1 or 2, wherein at least one of X5 to X8 is a substituent other than hydrogen atom.
4. A device according to any one of claims 1 - 3, wherein at least two of X1 to X4 are substituents other than hydrogen atom.
5. A device according to any one of claims 1 - 4, wherein at least one of X2, X3 and X4 has a Hammett's substituent constant of at least 0.2 with respect to the carbon atom connected to M, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.
6. A device according to any one of claims 1 - 5, wherein X2, X3 and X4 provides a sum of Hammett's substituent

constant of at least 0.41 with respect to the carbon atom connected to M, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.


7. A device according to claim 6, wherein the sum of Hammett's substituent constant is at least 0.50.
8. A device according to claim 1, wherein at least one substituent X1 to X8 has a Hammett's substituent constant of at least 0.2, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.
9. A device according to claim 8 wherein two or more substituents X1 to X8 have a Hammett's substituent constant of at least 0.2.
10. A device according to any one of claims 1 - 9, further comprising a pair of electrodes oppositely disposed to sandwich the organic compound layer, wherein a voltage is applied between the pair of electrodes to cause luminescence.
11. A display apparatus, comprising: a luminescence device according to any one of claims 1 - 10 and drive means for driving the luminescence device.
12. A metal coordination compound, adapted for use in a luminescence device, represented by the following formula (1) :

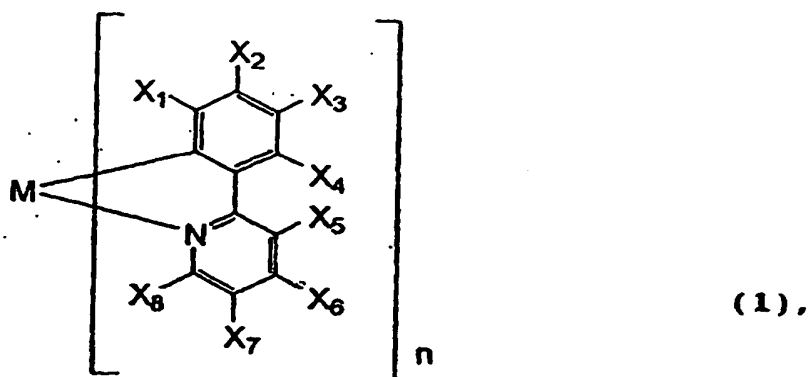

wherein M denotes Rh or Pd; n is 2 or 3; and X1 to X8 independently denote hydrogen atom or a substituent selected from the group consisting of a halogen atom; a nitro group; a trifluoromethyl group, a trialkylsilyl group having three linear or branched alkyl groups each independently having 1 - 8 carbon atoms; and a linear or branched alkyl group having 2 - 20 carbon atoms in which said alkyl group includes one methylene group or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and in which said alkyl group includes a hydrogen atom which can be replaced with fluorine atom; with the proviso that at least one of X1 to X8 is a substituent other than hydrogen atom, and X2 and X3 cannot be fluorine atom at the same time.


13. A compound according to claim 12, wherein at least two of X1 to X8 are substituents other than hydrogen atom.
14. A compound according to claim 12 or 13, wherein at least one of X5 to X8 is a substituent other than hydrogen atom.
15. A compound according to any one of claims 12 - 14, wherein at least two of X1 to X4 are substituents other than hydrogen atom.
16. A compound according to any one of claims 12 - 15, wherein at least one of X2, X3 and X4 has a Hammett's substituent constant of at least 0.2 with respect to the carbon atom connected to M, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.
17. A compound according to any one of claims 12 - 16, wherein X2, X3 and X4 provides a sum of Hammett's substituent constant of at least 0.41 with respect to the carbon atom connected to M, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.

18. A compound according to claim 17, wherein the sum of Hammett's substituent constant is at least 0.50.
19. A compound according to claim 12, wherein said at least one substituent of X1 to X8 has a Hammett's substituent constant of at least 0.2, and the metal coordination compound exhibits a peak emission wavelength in toluene at 25 °C of at most 490 nm.
20. A compound according to claim 19, wherein said at least one substituent of X1 to X8 includes two or more substituents each having a Hammett's substituent constant of at least 0.2.
21. A luminescence device, comprising: an organic compound layer comprising a metal coordination compound represented by the following formula (2):

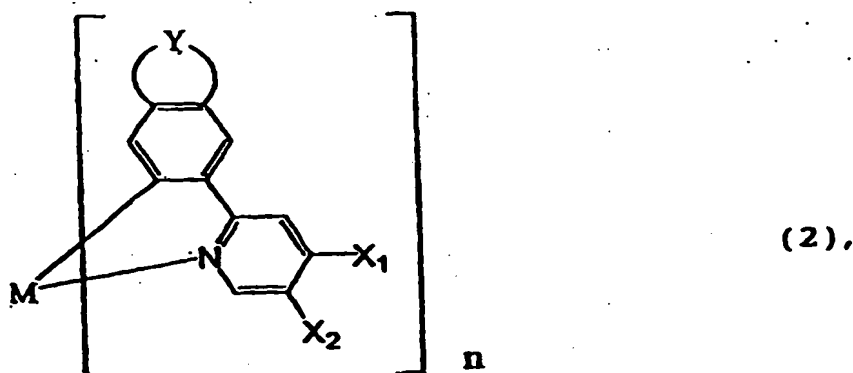

wherein M denotes, Ir, Rh or Pd; n is 2 or 3; Y denotes an alkylene group having 2 - 4 carbon atoms in which said alkylene group includes one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and in which said alkyl group includes a hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote a hydrogen atom; a halogen atom; a nitro group; a trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms in which said alkyl group includes one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C=C- and in which said alkyl group includes a hydrogen atom which can be replaced with fluorine atom.

22. A device according to claim 21, wherein at least one of X1 to X2 is hydrogen atom.
23. A device according to claim 21 or 22, further comprising a pair of electrodes oppositely disposed to sandwich the organic compound layer, wherein a voltage is applied between the pair of electrodes to cause luminescence.
24. A metal coordination compound, adapted for use in a luminescence device, represented by the following formula (2):

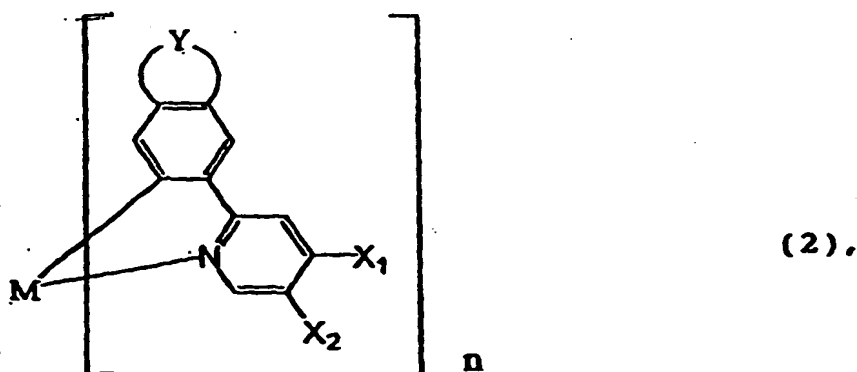


wherein M denotes Ir, Rh or Pd; n is 2 or 3; Y denotes an alkylene group having 2 - 4 carbon atoms in which said alkylene group includes one or at least two non-neighboring methylene groups which can be replaced with -O-, -S- or -CO- and in which said alkylene group includes a hydrogen atom which can be replaced with a linear or branched alkyl group having 1 - 10 carbon atoms; and X1 and X2 independently denote a hydrogen atom; a halogen atom; a nitro group; a trialkylsilyl group having 1 - 8 carbon atoms; or a linear or branched alkyl group having 1 - 20 carbon atoms in which said alkyl group includes one or at least two non-neighboring methylene groups which can be replaced with -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- or -C≡C- and in which said alkyl group includes a hydrogen atom which can be replaced with fluorine atom.

25. A compound according to claim 24, wherein at least one of X1 to X2 is hydrogen atom.

### Patentansprüche

1. Lumineszenzvorrichtung, umfassend: eine Schicht aus einer organischen Verbindung, die eine durch die folgende Formel (1) dargestellte Metallkoordinationsverbindung umfasst:

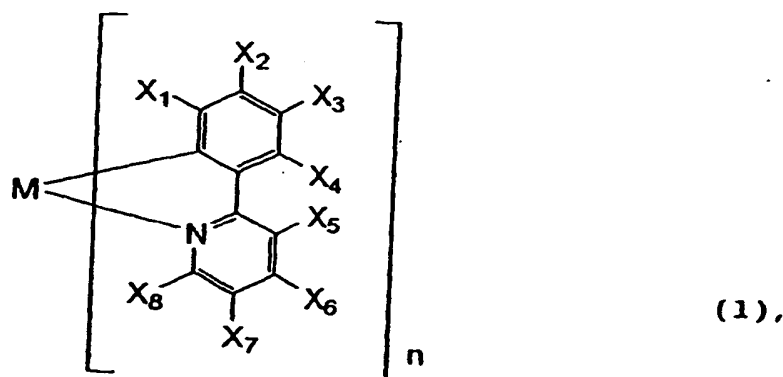


wobei M für Rh oder Pd steht; n gleich 2 oder 3 ist; und X1 bis X8 unabhängigerweise ein Wasserstoffatom oder einen Substituenten bedeuten, ausgewählt aus der Gruppe, bestehend aus einem Halogenatom; einer Nitrogruppe; einer Trifluormethylgruppe; einer Trialkylsilylgruppe mit drei linearen oder verzweigten Alkylgruppen, die jeweils unabhängigweise 1 bis 8 Kohlenstoffatome aufweisen; und einer linearen oder verzweigten Alkylgruppe mit 2 bis 20 Kohlenstoffatomen, in welchem die Alkylgruppe eine Methylengruppe oder wenigstens zwei nicht benachbarte Methylengruppen mit umfasst, welche durch -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- oder -C≡C- ersetzt werden können, und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches durch ein Fluoratom ersetzt werden kann; und zwar unter der Voraussetzung, dass wenigstens eines von X1 bis X8 ein anderer Substituent als ein Wasserstoffatom ist und X2 und X3 nicht gleichzeitig ein Fluoratom sein können.

2. Eine Vorrichtung gemäß Anspruch 1, wobei wenigstens zwei der X1 bis X8 ein anderer Substituent als ein Wasserstoffatom sind.
3. Eine Vorrichtung gemäß Anspruch 1 oder 2, wobei wenigstens einer aus X5 bis X8 ein anderer Substituent als ein Wasserstoffatom ist.
4. Eine Vorrichtung gemäß irgendeinem der Ansprüche 1 bis 3, wobei wenigstens zwei der X1 bis X4 andere Substituenten als ein Wasserstoffatom sind.
5. Eine Vorrichtung gemäß irgendeinem der Ansprüche 1 bis 4, wobei wenigstens einer von X2, X3 und X4 eine Hammett-Konstante des Substituten von wenigstens 0,2 bezüglich des an das M gebundene Kohlenstoffatom aufweist, und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.
6. Eine Vorrichtung gemäß irgendeinem der Ansprüche 1 bis 5, wobei X2, X3 und X4 in der Summe eine Hammett-Kon-

stante der Substituten von wenigstens 0,41 bezüglich des an das M gebundene Kohlenstoffatom vorsehen und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.

7. Eine Vorrichtung gemäß Anspruch 6, wobei die Summe der Hammett-Konstante des Substituten wenigstens 0,50 ist.
8. Eine Vorrichtung gemäß Anspruch 1, wobei wenigstens ein Substituent aus X1 bis X8 eine Hammett-Konstante des Substituten von wenigstens 0,2 aufweist und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.
9. Eine Vorrichtung gemäß Anspruch 8, wobei zwei oder mehrere Substituenten X1 bis X8 eine Hammett-Konstante des Substituten von wenigstens 0,2 aufweisen.
10. Eine Vorrichtung gemäß irgendeinem der Ansprüche 1 bis 9, welche ferner ein Elektrodenpaar umfasst, die gegenüberliegend derart angeordnet sind, dass sie die Schicht aus einer organischen Verbindung sandwichartig umgeben, wobei eine Spannung zwischen dem Elektrodenpaar angelegt ist, um Lumineszenz zu erzeugen.
11. Ein Anzeigegerät, umfassend: eine Lumineszenzvorrichtung gemäß irgendeinem der Ansprüche 1 bis 10 und eine Antriebseinrichtung zum Antrieb der Lumineszenzvorrichtung.
12. Eine Metallkoordinationsverbindung, die für den Einsatz in einer Lumineszenzvorrichtung angepasst ist, welche durch die folgende Formel (1) dargestellt ist:

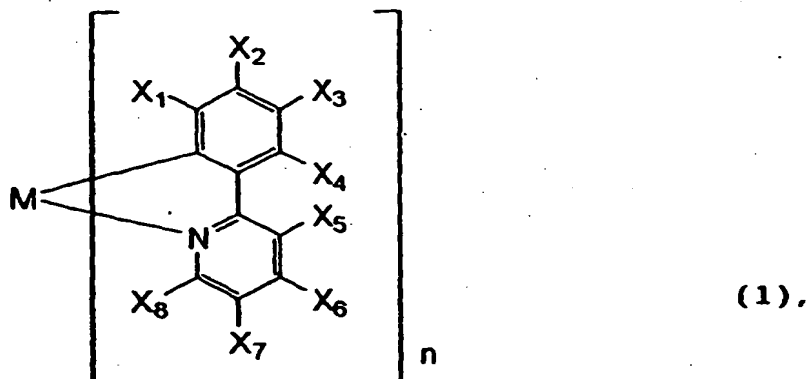


wobei M für Rh oder Pd steht; n gleich 2 oder 3 ist; und X1 bis X8 unabhängigerweise ein Wasserstoffatom oder einen Substituenten bedeuten, ausgewählt aus der Gruppe, bestehend aus einem Halogenatom; einer Nitrogruppe; einer Trifluormethylgruppe; einer Trialkylsilylgruppe mit drei linearen oder verzweigten Alkylgruppen, die jeweils unabhängigerweise 1 bis 8 Kohlenstoffatome aufweisen; und einer linearen oder verzweigten Alkylgruppe mit 2 bis 20 Kohlenstoffatomen, in welchem die Alkylgruppe eine Methylengruppe oder wenigstens zwei nicht benachbarte Methylengruppen mit umfasst, welche durch -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- oder -C=C- ersetzt werden können, und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches durch ein Fluoratom ersetzt werden kann; und zwar unter der Voraussetzung, dass wenigstens eines von X1 bis X8 ein anderer Substituent als ein Wasserstoffatom ist und X2 und X3 nicht gleichzeitig ein Fluoratom sein können.

13. Eine Verbindung gemäß Anspruch 12, wobei wenigstens zwei der X1 bis X8 ein anderer Substituent als ein Wasserstoffatom sind.
14. Eine Verbindung gemäß Anspruch 12 oder 13, wobei wenigstens einer aus X5 bis X8 ein anderer Substituent als ein Wasserstoffatom ist.
15. Eine Verbindung gemäß irgendeinem der Ansprüche 12 bis 14, wobei wenigstens zwei der X1 bis X4 andere Substituenten als ein Wasserstoffatom sind.
16. Eine Verbindung gemäß irgendeinem der Ansprüche 12 bis 15, wobei wenigstens einer von X2, X3 und X4 eine

Hammett-Konstante des Substituenten von wenigstens 0,2 bezüglich des an das M gebundene Kohlenstoffatom aufweist, und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.


17. Eine Verbindung gemäß irgendeinem der Ansprüche 12 bis 16, wobei X<sub>2</sub>, X<sub>3</sub> und X<sub>4</sub> in der Summe der Hammett-Konstante der Substituenten wenigstens 0,41 bezüglich des an das M gebundene Kohlenstoffatom vorsehen und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.
18. Eine Verbindung gemäß Anspruch 17, wobei die Summe der Hammett-Konstante des Substituenten wenigstens 0,50 ist.
19. Eine Verbindung gemäß Anspruch 12, wobei wenigstens ein Substituent aus X<sub>1</sub> bis X<sub>8</sub> eine Hammett-Konstante des Substituenten von wenigstens 0,2 aufweist und die Metallkoordinationsverbindung eine Peakemissionswellenlänge in Toluol bei 25°C von höchstens 490 nm aufweist.
20. Eine Verbindung gemäß Anspruch 19, wobei wenigstens ein Substituent aus X<sub>1</sub> bis X<sub>8</sub> zwei oder mehrere Substituenten mit einschließt, die jeweils eine Hammett-Konstante des Substituenten von wenigstens 0,2 aufweisen.
21. Eine Lumineszenzvorrichtung, umfassend: eine Schicht aus einer organischen Verbindung, die eine durch die folgende Formel (2) dargestellte Metallkoordinationsverbindung umfasst:

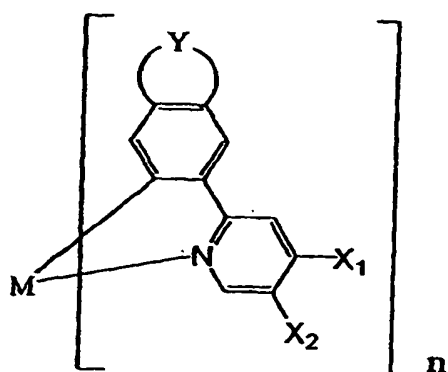

(2)

wobei M für Ir, Rh oder Pd steht; n gleich 2 oder 3 ist; Y für eine Alkylengruppe mit 2 bis 4 Kohlenstoffatomen steht, in welcher die Alkylengruppe eine oder wenigstens zwei nicht benachbarte Methylengruppen mit einschließt, welche durch -O-, -S- oder -CO- ersetzt werden können und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches mit einer linearen oder verzweigten Alkylgruppe mit 1 bis 10 Kohlenstoffatomen ersetzt werden kann; und X<sub>1</sub> und X<sub>2</sub> unabhängigweise ein Wasserstoffatom; ein Halogenatom; eine Nitrogruppe; eine Trialkylsilylgruppe mit 1 bis 8 Kohlenstoffatomen; oder eine lineare oder verzweigte Alkylgruppe mit 1 bis 20 Kohlenstoffatomen, in welchem die Alkylgruppe ein oder wenigstens zwei nicht benachbarte Methylengruppen mit einschließt, welche durch -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- oder -C=C- ersetzt werden können, und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches durch ein Fluoratom ersetzt werden kann, mit einschließt.

22. Eine Vorrichtung gemäß Anspruch 21, wobei wenigstens eines aus X<sub>1</sub> bis X<sub>2</sub> ein Wasserstoffatom ist.
23. Eine Vorrichtung gemäß Anspruch 21 oder 22, welche ferner ein Elektrodenpaar umfasst, die gegenüberliegend derart angeordnet sind, dass sie die Schicht aus einer organischen Verbindung sandwichartig umgeben, wobei eine Spannung zwischen dem Elektrodenpaar angelegt ist, um Lumineszenz zu erzeugen
24. Eine Metallkoordinationsverbindung, die für den Einsatz in einer Lumineszenzvorrichtung angepasst ist, welche durch die folgende Formel (2) dargestellt ist:

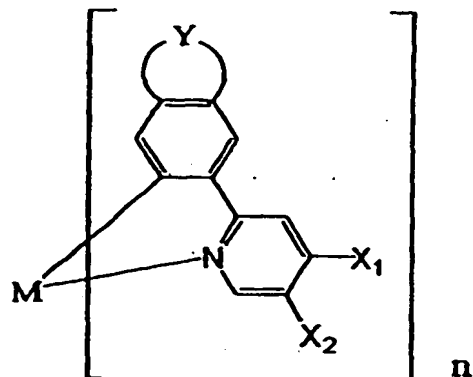


wobei M für Ir, Rh oder Pd steht; n gleich 2 oder 3 ist; Y für eine Alkylengruppe mit 2 bis 4 Kohlenstoffatomen steht, in welcher die Alkylengruppe eine oder wenigstens zwei nicht benachbarte Methylengruppen mit einschließt, welche durch -O-, -S- oder -CO- ersetzt werden können und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches mit einer linearen oder verzweigten Alkylgruppe mit 1 bis 10 Kohlenstoffatomen ersetzt werden kann; und X1 und X2 unabhängigweise ein Wasserstoffatom; ein Halogenatom; eine Nitrogruppe; eine Trialkylsilylgruppe mit 1 bis 8 Kohlenstoffatomen; oder eine lineare oder verzweigte Alkylgruppe mit 1 bis 20 Kohlenstoffatomen, in welchem die Alkylgruppe ein oder wenigstens zwei nicht benachbarte Methylengruppen mit einschließt, welche durch -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- oder -C=C- ersetzt werden können, und in welchem die Alkylgruppe ein Wasserstoffatom mit einschließt, welches durch ein Fluoratom ersetzt werden kann, mit einschließt.

25. Eine Verbindung gemäß Anspruch 24, wobei wenigstens eines aus X1 bis X2 ein Wasserstoffatom ist.

### Revendications


1. Dispositif luminescent comprenant: une couche de composé organique comprenant un composé de coordination métallique représenté par la formule suivante (1) :

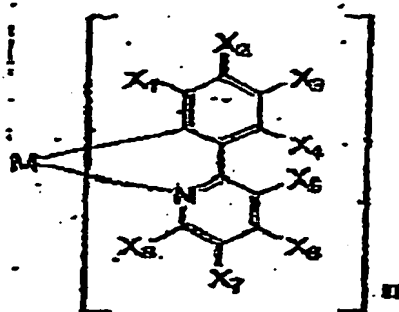

dans laquelle M désigne Rh ou Pd ; n est 2 ou 3 ; et X1 à X8 désignent indépendamment un atome d'hydrogène ou un substituant choisi dans le groupe composé d'un atome d'halogène ; d'un groupe nitro ; d'un groupe trifluorométhyle, d'un groupe trialkylsilyle ayant trois groupes alkyles linéaires ou ramifiés ayant chacun indépendamment de 1 à 8 atomes de carbone ; et d'un groupe alkyle linéaire ou ramifié ayant de 2 à 20 atomes de carbone où ledit groupe alkyle comprend un groupe méthylène ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S-, -CO-, -CO-O-, -O-CO- -CH=CH- ou -C=C- et où ledit groupe alkyle comprend un atome d'hydrogène qui peut être remplacé par un atome de fluor ; avec la condition qu'au moins un des X1 à X8 soit un substituant autre qu'un atome d'hydrogène, et que X2 et X3 ne puissent pas être en même temps un atome de fluor.

2. Dispositif selon la Revendication 1, dans lequel au moins deux de X1 à X8 sont des substituants autres qu'un atome d'hydrogène.

3. Dispositif selon la Revendication 1 ou 2, dans lequel au moins un de X5 à X8 est un substituant autre qu'un atome d'hydrogène.
4. Dispositif selon l'une quelconque des Revendications 1 à 3, dans lequel au moins deux de X1 à X4 sont des substituants autres qu'un atome d'hydrogène.
5. Dispositif selon l'une quelconque des Revendications 1 à 4, dans lequel au moins un de X2, X3 et X4 possède une constante de substitution de Hammett d'au moins 0,2 par rapport à l'atome de carbone relié à M, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
6. Dispositif selon l'une quelconque des Revendications 1 à 5, dans lequel X2, X3 et X4 fournissent une somme de la constante de substitution de Hammett d'au moins 0,41 par rapport à l'atome de carbone relié à M, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
7. Dispositif selon la Revendication 6, dans lequel la somme de la constante de substitution de Hammett est au moins 0,50.
8. Dispositif selon la Revendication 1, dans lequel au moins un substituant X1 à X8 possède une constante de substitution de Hammett d'au moins 0,2, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
9. Dispositif selon la Revendication 8, dans lequel deux ou plusieurs substituants X1 à X8 possèdent une constante de substitution de Hammett d'au moins 0,2.
10. Dispositif selon l'une quelconque des Revendications 1 à 9, comprenant de plus une paire d'électrodes disposées de manière opposée afin d'encadrer la couche de composé organique, dans lequel une tension est appliquée entre la paire d'électrodes afin de provoquer une luminescence.
11. Appareil d'affichage comprenant un dispositif luminescent selon l'une quelconque des Revendications 1 à 10, et un moyen de pilotage afin de piloter le dispositif luminescent.
12. Composé de coordination métallique, adapté pour une utilisation dans un dispositif luminescent, représenté par la formule suivante (1) :

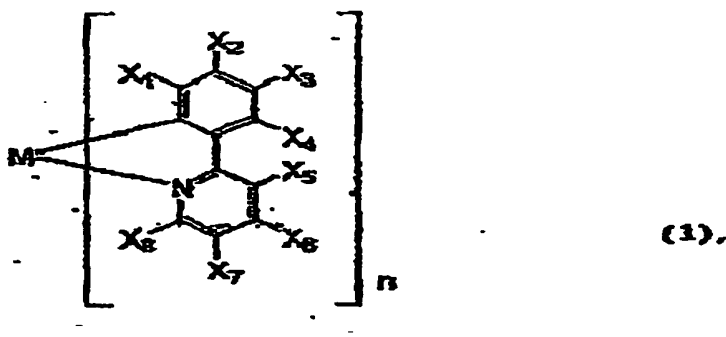


dans laquelle M désigne Rh ou Pd ; n est 2 ou 3 ; et X1 à X8 désignent indépendamment un atome d'hydrogène ou un substituant choisi dans le groupe composé d'un atome d'halogène ; d'un groupe nitro ; d'un groupe trifluorométhyle, d'un groupe trialkylsilyle ayant trois groupes alkyles linéaires ou ramifiés ayant chacun indépendamment de 1 à 8 atomes de carbone ; et d'un groupe alkyle linéaire ou ramifié ayant de 2 à 20 atomes de carbone où ledit groupe alkyle comprend un groupe méthylène ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- ou -C≡C- et où ledit groupe alkyle comprend un atome d'hydrogène qui peut être remplacé par un atome de fluor ; avec la condition qu'au moins un de X1 à X8 soit un substituant autre qu'un atome d'hydrogène, et que X2 et X3 ne puissent pas être en même temps un atome de fluor.

13. Composé selon la Revendication 12, dans lequel au moins deux de X1 à X8 sont des substituants autres qu'un



atome d'hydrogène.

14. Composé selon la Revendication 12 ou 13, dans lequel au moins un de X5 à X8 est un substituant autre qu'un atome d'hydrogène.
15. Composé selon l'une quelconque des Revendications 12 à 14, dans lequel au moins deux de X1 à X4 sont des substituants autres qu'un atome d'hydrogène.
16. Composé selon l'une quelconque des Revendications 12 à 15, dans lequel au moins un de X2, X3 et X4 possède une constante de substitution de Hammett d'au moins 0,2 par rapport à l'atome de carbone relié à M, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
17. Composé selon l'une quelconque des Revendications 12 à 16, dans lequel X2, X3 et X4 fournissent une somme de la constante de substitution de Hammett d'au moins 0,41 par rapport à l'atome de carbone relié à M, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
18. Composé selon la Revendication 17, dans lequel la somme de la constante de substitution de Hammett est au moins 0,50.
19. Composé selon la Revendication 12, dans lequel au moins un substituant de X1 à X8 possède une constante de substitution de Hammett d'au moins 0,2, et le composé de coordination métallique présente une longueur d'onde maximale d'émission dans le toluène à 25°C d'au plus 490 nm.
20. Dispositif selon la Revendication 19, dans lequel ledit au moins un substituant de X1 à X8 comprend deux ou plusieurs substituants possédant chacun une constante de substitution de Hammett d'au moins 0,2
21. Dispositif luminescent comprenant: une couche de composé organique comprenant un composé de coordination d'un métal représenté par la formule suivante (2) :

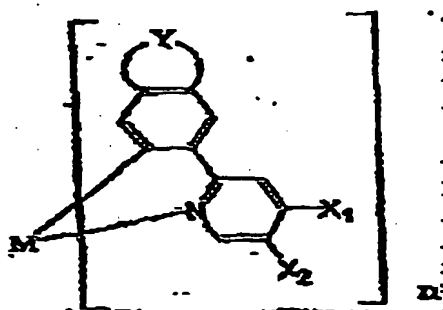


dans laquelle M désigne Ir, Rh ou Pd ; n est 2 ou 3 ; Y désigne un groupe alkylène ayant de 2 à 4 atomes de carbone où ledit groupe alkylène comprend un ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S- ou -CO- et où ledit groupe alkyle comprend un atome d'hydrogène qui peut être remplacé par un groupe alkyle linéaire ou ramifié ayant de 1 à 10 atomes de carbone ; et X1 et X2 désignent indépendamment un atome d'hydrogène ; un atome d'halogène ; un groupe nitro ; un groupe trialkylsilyl ayant de 1 à 8 atomes de carbone ; ou un groupe alkyle linéaire ou ramifié ayant de 1 à 20 atomes de carbone où ledit groupe alkyle comprend un groupe méthylène ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- ou -C≡C- et où ledit groupe alkyle comprend un atome d'hydrogène qui peut être remplacé par un atome de fluor.

22. Dispositif selon la Revendication 21, dans lequel au moins un de X1 et X2 est un atome d'hydrogène.
23. Dispositif selon la Revendication 21 ou 22, comprenant de plus une paire d'électrodes disposées de manière opposée afin d'encadrer la couche de composé organique, dans lequel une tension est appliquée entre la paire d'électrodes

afin de provoquer une luminescence.

24. Composé de coordination d'un métal, adapté pour une utilisation dans un dispositif luminescent, représenté par la formule suivante (2) :

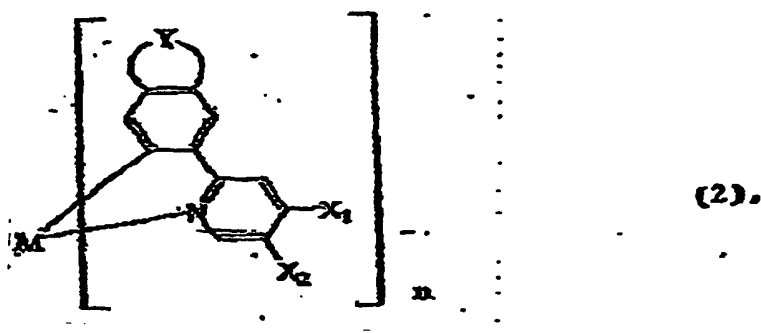

dans laquelle M désigne Ir, Rh ou Pd ; n est 2 ou 3 ; Y désigne un groupe alkylène ayant de 2 à 4 atomes de carbone où ledit groupe alkylène comprend un ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S- ou -CO- et où ledit groupe alkylène comprend un atome d'hydrogène qui peut être remplacé par un groupe alkyle linéaire ou ramifié ayant de 1 à 10 atomes de carbone ; et X1 et X2 désignent indépendamment un atome d'hydrogène ; un atome d'halogène ; un groupe nitro ; un groupe trialkylsilyl ayant de 1 à 8 atomes de carbone ; ou un groupe alkyle linéaire ou ramifié ayant de 1 à 20 atomes de carbone où ledit groupe alkylène comprend un groupe méthylène ou au moins deux groupes méthylènes non voisins qui peuvent être remplacés par -O-, -S-, -CO-, -CO-O-, -O-CO-, -CH=CH- ou -C≡C- et où ledit groupe alkylène comprend un atome d'hydrogène qui peut être remplacé par un atome de fluor.

25. Composé selon la Revendication 24, dans lequel au moins un de X1 et X2 est un atome d'hydrogène.

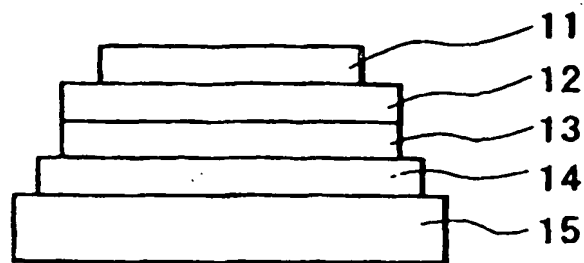


FIG. 1A

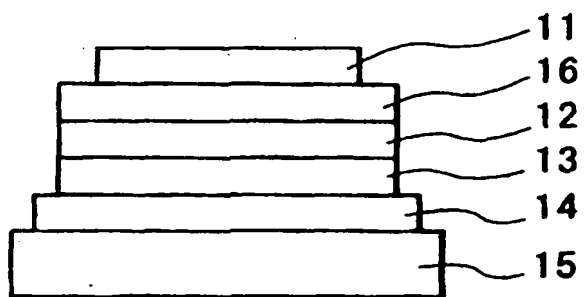


FIG. 1B

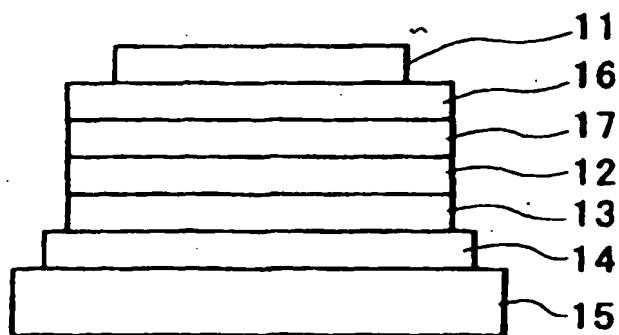


FIG. 1C

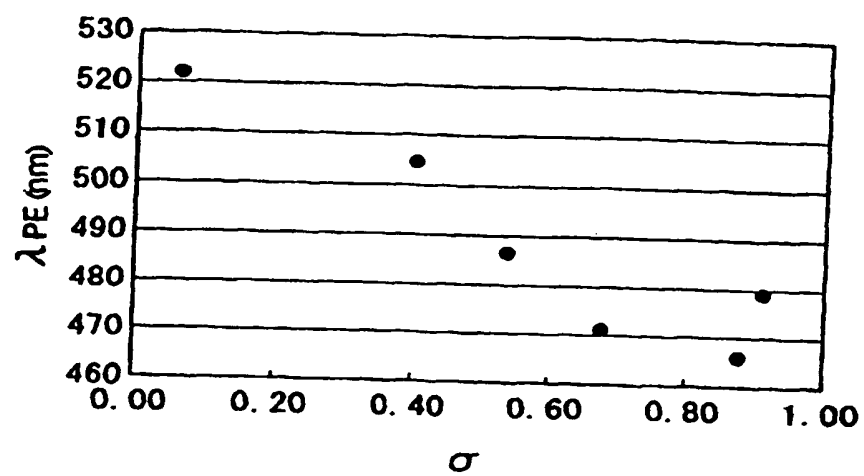


FIG. 2

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)